

**Partner: GE Interlogix**  
**Model: NX-8E**  
**Device Type: Security**



## GENERAL INFORMATION

<b>SIMPLWINDOWS NAME:</b>	GE Interlogix Network System Status v4.7
<b>CATEGORY:</b>	Security
<b>VERSION:</b>	4.7
<b>SUMMARY:</b>	This module provides system status feedback.
<b>GENERAL NOTES:</b>	This module provides system status feedback.
<b>CRESTRON HARDWARE REQUIRED:</b>	C2COM1, C2COM2/3
<b>SETUP OF CRESTRON HARDWARE:</b>	RS232 Baud: 9600 Parity: None Data Bits: 8 Stop Bits: 1
<b>VENDOR FIRMWARE:</b>	NX-8E V19.00 65BD 08/03/07

**Partner: GE Interlogix**  
**Model: NX-8E**  
**Device Type: Security**



**VENDOR SETUP:**


The NX-8E has the NX-584 built onto the main board. You must enter programming mode and enable the NX-584 by setting Location 207 to "1". Location 23 enables and disables function globally. For instance, if Location 23 Segment 1 Bit 1 is enabled, the STAY function will be enabled on the NX-8E keypads. The STAY function will be enabled on the Crestron system if Location 23 Segment 1 Bit 1 and Location 211 Segment 4 Bit 7 are enabled. If Location 23 Segment 1 Bit 1 is disabled, the STAY function will be disabled for both the NX-8E keypads and the Crestron system, no matter what Location 211 Segment 4 Bit 7 is set to.

The following locations need to be set as listed below.

Location	Setting
23	Segment 1 bits 1, 5, 6 & 7 enabled. All others disabled.
23	Segment 2 bit 4 enabled. All others disabled.
23	Segments 3, 4 & 5 all bits disabled.
207	"1" for NX-584 Enabled.
208	"2" for 9600 Baud.
209	Bit 1 set to "1" for LED On ASCII.
210	Segment 1 All disabled.
210	Segment 2 All disabled.
211	Segment 1 bits 4, 6 & 7 enabled. All others disabled.
211	Segment 2 bits 1 & 3 enabled. All others disabled.
211	Segment 3 bits 3, 5 & 7 enabled. All others disabled.
211	Segment 4 bits 5, 7 & 8 enabled. All others disabled.

**CABLE DIAGRAM:**

CNSP-124

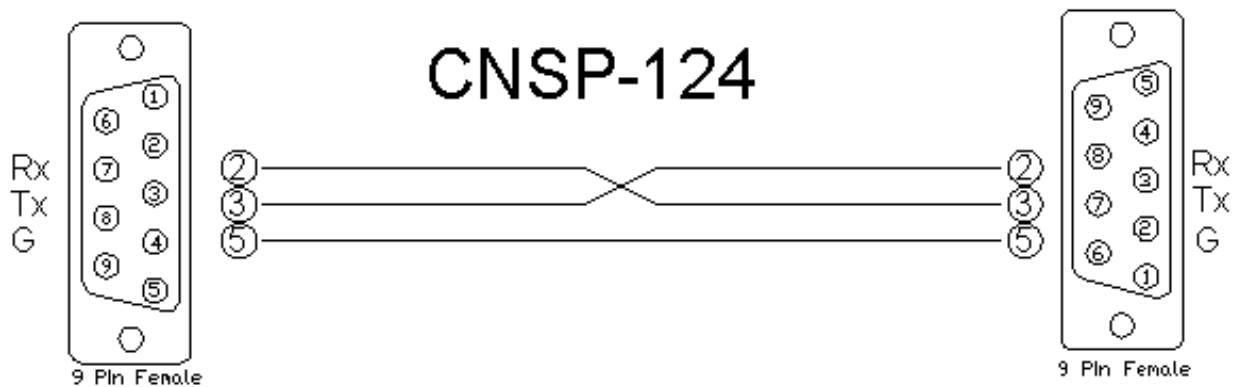

**Partner: GE Interlogix**  
**Model: NX-8E**  
**Device Type: Security**



**CONTROL:**

From_Processor_Module\$	S	Serial signal to be routed from the GE Interlogix Network Processor Module v4.6.
-------------------------	---	--

**FEEDBACK:**

*	D	Output names are the names listed in the protocol manual for the system status.
---	---	---

**TESTING:**

OPS USED FOR TESTING:	CP3: 1.501.0013
-----------------------	-----------------

SIMPL WINDOWS USED FOR TESTING:	4.03.20
---------------------------------	---------

DEVICE DB USED FOR TESTING:	72.00.001.00
-----------------------------	--------------

CRES DB USED FOR TESTING:	54.05.005.00
---------------------------	--------------

SYMBOL LIBRARY USED FOR TESTING:	982
----------------------------------	-----

SAMPLE PROGRAM:	GE Interlogix Network v4.7 Demo
-----------------	---------------------------------

<b>REVISION HISTORY:</b>	<p>2.0 – 7/27/2005 – Changed several modules. The processor module has been changed so that it does not poll the NX-8E. This allows the commands to be sent to the NX-8E more promptly. The Partition and Zone modules have been changed to provide more feedback. All SIMPL+ modules have been changed to use volatile memory instead of non-volatile memory.</p> <p>3.0 – 9/22/2005 – Changed several modules. The processor module has been changed so that it does poll. This allows us to control all communications between the Crestron and the NX-8E. The zone bypass modules and the zone name modules have been changed to allow the zone number to be entered as a decimal. This will allow the module to be copied and pasted using the auto increment function.</p> <p>4.0 – 5/17/2006 – Fixed the GE Interlogix Network Processor Module v4.0 module. It had a user function that had the same name as a new built in function in the Simpl+ file.</p> <p>4.1 – 1/27/2009 – Fixed an issue with the GE Interlogix Network Processor Module v4.1 that caused errors in the processor module. Also fixed a labeling issue with the cable diagram in the help file.</p> <p>4.2 – 8/7/2009 – Fixed an issue with processing the responses from the GE causing errors. Changed the way that the serial queue is handled. Increased the size of the command queue.</p> <p>4.3 – 1/6/2010 – Per GE, changed the poll time to 15 seconds.</p> <p>4.6 – Optimized the Simpl+ for 3-series processors.</p> <p>4.7 – Fixed an issue with the GE Interlogix Network Processor Module not properly handling the feedback responses for the partitions.</p>
--------------------------	---