

Programming Crestron Controllers

for a Kaleidescape System

May 2015

Contents

Who Should Use This Document	8
Getting Started with Crestron	8
Overview of Kaleidescape Modules and Templates	8
Touch Panels and Keypads	9
Touch panels	9
Touch panel variations	9
OSD control with a video window	10
OSD control without a video window	10
Standalone touch panel (SATP) control	11
Layout for touch panel user interface	12
Keypads	13
Using Music Presets	13
Music items in the Kaleidescape System	14
Random and repeat	15
Tags and the Preset ID	15
Zones	16
Saving presets	16
Preset browsing	16
Preset feedback	16
Collection browsing	17
Programming	18
Kaleidescape command protocol	18
Device ID	19
Kaleidescape music zones	19
Kaleidescape modules	20
OSD module (Onscreen display control)	20
SATP module (Standalone touch panel control)	20
Keypad Presets module	21
Keypad Music Collections module	21

Controller Zone Name module	21
Importing modules	22
Downloading and extracting Kaleidescape modules and templates for	
Crestron	22
Module contents	22
Automatic import	23
Module version number	24
Updating the modules	25
Scalability	26
System builder	26
Connection methods	26
Programming options	27
Command routing	28
Command routing via TCP/IP	28
Command routing via RS-232	29
Setting the Control Protocol Device ID (CPDID)	29
CPDID addressing example	30
Music zone control	33
Naming music zones	33
Controlling music zones	34
Music zone selection	34
OSD module music zone selection	35
Controlling a movie zone with both SATP and OSD control	38
Calibrating the touch interface	38
Power control	39
Power control for the Movie Player (KPLAYER-2000, KPLAYER-2500)	39
Power control for the 1080p Player, 1080p Mini Player, Music Player, and Movie Player 2	40
Power control for Cinema One (1 st generation)	40
Power control for M-Class players	40
Power control for Alto and Cinema One (2 nd generation)	41

Sample Installation	41
Assigning static IP addresses	42
Configuring TCP/IP clients	43
Configuring touch panels	47
Programming TCP/IP clients	48
Programming touch panels	48
Adding Kaleidescape modules	50
Programming Kaleidescape modules	52
Indicating System Readiness	53
Screen masking and anamorphic lenses	53
CinemaScape mask	54
Lighting and shades	54
Secondary SATP control	55
Volume control	55
Troubleshooting	56
User program commands	56
Nothing is working	58
Music is not changing (SATP controlled zone)	58
Cannot make selections with a touch panel with a video window	58
No video on the touch panel with a video window	59
Video on the touch panel is black and white	59
Getting additional support	59
Appendix A: Screen Shots for UI Layouts	60
OSD control with a video window — Music	60
OSD control with a video window — Movies	61
OSD control without a video window — Music	62
OSD control without a video window — Movies	63
Standalone touch panel	64
Appendix B: RS-232 Port Configuration and Cable Pinout	65

Port configuration	65
M500 Player, Music Player, and Cinema One (1st generation)	65
1U, 3U, and 5U Servers	65
RS-232 port pinouts	65
Appendix C: OSD Module v8.4.0 Parameters and I/O	66
Parameters	66
Control Protocol Device ID (CPDID)	66
Time Update Interval	66
Using a Controlled Mask	66
Kaleidescape App for iPad Volume Ability	66
Inputs	66
Transports	66
Navigation	68
OSD menu control	69
Movie playback	71
Music playback	72
Volume control	73
Keyboard/Keypad	73
Screen masking	73
Script control	74
Power	74
Music zone control	75
Outputs	75
Transports	75
Navigation	75
OSD menu control	75
Movie playback	77
Music playback	78
Playback information	78
Volume control	79
Details page	80

Keyboard/Keypad	80
CinemaScape	81
Screen masking	81
Lighting cues	82
Video mode	83
Script control	84
Power	84
System Readiness State	84
Music zone control	84
Child commands	85
Appendix D: SATP Module v8.4.0 Parameters and I/O	86
Parameters	86
Control Protocol Device ID (CPDID)	86
Zone ID	86
Time Update Interval	86
List Window Length	86
Kaleidescape App for iPad Volume Ability	86
Inputs	86
Transports	87
Playback control	87
Volume control	87
List control	87
List window	88
Keyboard	88
Power	89
Outputs	89
Transports	89
Playback control	89
Playback information	90
Volume control	90
List control	90

List window	91
Keyboard	92
System Readiness State	92
Appendix E: Keypad Presets Module v7.1.0 Parameters and I/O	93
Parameters	93
Control Protocol Device ID (CPDID)	93
Zone ID	93
Preset ID	93
Hold Time	93
Inputs	93
Outputs	94
Appendix F: Music Collection Module v7.1.0 Parameters and I/O	96
Parameters	96
Control Protocol Device ID (CPDID)	96
Zone ID	96
Collection	96
Inputs	96
Outputs	96
Appendix G: Controller Zone Name Module v8.3.0 Parameters and I/O	98
Parameters	98
Controller_Zone_Name_X	98
Inputs	98
Outputs	98
Appendix H: Revision History	99
Crestron OSD module	99
Crestron SATP module	101
Crestron Keypad module	103
Crestron Controller Zone Name (CZN) module	104
Crestron touch panel templates	104

Who Should Use This Document

This document explains how to configure a Crestron control system for a Kaleidescape System. Kaleidescape provides modules and templates specifically designed for controlling Kaleidescape Systems using Crestron controllers.

The installer must be familiar with the Crestron SIMPL Windows programming environment, Crestron VisionTools Pro-e, and Kaleidescape products.

This document revision corresponds to kOS version 6.1, Kaleidescape OSD and SATP modules version 8.4.0, Zone Name module version 8.3.0, and Keypad modules 7.1.0.

Getting Started with Crestron

Kaleidescape provides both control modules and touch panel templates for Crestron controllers.

Before setting up a Kaleidescape System for a Crestron system, the Kaleidescape modules and templates for Creston controllers must be downloaded and extracted. See *Downloading and extracting Kaleidescape modules and templates for Crestron* on page 22 for information on downloading and importing the Kaleidescape module and templates.

For information on installing and configuring the Kaleidescape System, refer to the Kaleidescape Installation Guide (www.kaleidescape.com/go/install) on the Kaleidescape website (www.kaleidescape.com).

Overview of Kaleidescape Modules and Templates

Kaleidescape provides five Crestron control modules.

- Onscreen display (OSD) module for controllers with and without video
 - OSD Video template Displays the Kaleidescape System OSD on the touch panel, along with other controls.
 - OSD No Video template Shows text-based details, replicating the details pages for movies or albums.
- SATP module (standalone touch panel)
 - Provides text-based music controls on touch panels in rooms without video displays.
- Keypad Presets module
- Keypad Music Collections module
- Controller Zone Name module

 Used with instances of the Kaleidescape App for iPad configured with a controller zone name to receive volume commands and send volume feedback.

Kaleidescape modules are designed to provide the flexibility required for many types of installations. System control can be as simple as using a single RS-232 port to control a single movie zone, or as complicated as a large system using multiple TCP/IP clients with complex signal routing to control several movie and music zones.

Touch panel controls are an integral part of the Kaleidescape experience. Kaleidescape touch panel control templates can be incorporated into Crestron projects without major modifications. These templates are complex and any modification can remove important functions or introduce bugs.

The following Kaleidescape templates are available for touch panels:

- OSD Video
- OSD No Video
- SATP

Touch Panels and Keypads

Touch panels

Kaleidescape modules use the full screen on a touch panel and incorporate a large video window to provide complete consistency even when a separate video display is unavailable. Only the buttons required for a particular feature are displayed. For example, the keyboard is displayed only when alphanumeric input is required. After text entry is complete, the keyboard vanishes. Pop-up windows are used sparingly to simplify the user experience and to manage secondary and tertiary controls. The upper right corner of the layout is intentionally left open so a programmer can add buttons to tie into other whole-house sources and controls.

Touch panel variations

Kaleidescape offers three types of touch panel controls.

- OSD control WITH a video window
- OSD control WITHOUT a video window
- Standalone touch panel (SATP)

OSD with a video window provides the richest user experience and is the Kaleidescape preferred implementation. When choosing which variation to use for a particular installation, consider whether or not a video display is present, what the technical capabilities of the touch panel are, and whether a movie or music zone is to be controlled. Most installations need to implement several touch panel variations to provide quality control in every zone.

Touch panel variations are packaged separately and available as downloadable VTP files. Each file is constructed as a single page with sub-pages to manage secondary and tertiary controls within each variation. The corresponding Kaleidescape module must also be downloaded.

The touch panel variations in Figures 1 through 3 are screenshots taken from the 1024×768 pixel template for the Crestron TPS-15. Refer to *Appendix A: Screen Shots for UI Layouts* on page 60 for more sample screen shots of all three variations.


OSD control with a video window

The OSD Video template displays the Kaleidescape System OSD on the touch panel simplifying user operation. Kaleidescape strongly recommends that installers use this interface configuration to deliver a superior user experience for both movies and music.

This solution has the following requirements:

- A touch panel that supports a video window
- A Kaleidescape movie zone to provide video output to the panel

Figure 1: OSD control with a video window

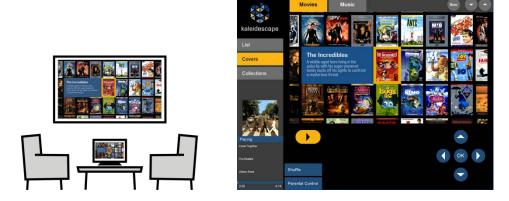

OSD control without a video window

Instead of the video window, the OSD No Video template delivers text-based details for the content currently selected in the OSD. The touch panel replicates the movie details page or album details page for the selected movie or album in any OSD view. Use this variation only when the touch panel cannot support a video window or when the touch panel has too little area to display the OSD video image clearly.

On Premiere line systems, Kaleidescape provides control panels in the browser interface identical to this OSD touch panel.

This solution has the following requirements:

- A Kaleidescape movie zone
- A video display in the same room as the touch panel

Figure 2: OSD Control without a video window



Standalone touch panel (SATP) control


The standalone touch panel (SATP) control provides control for music on touch panels in rooms without video displays, like hallways, dining rooms, and patios, or touch panels with display areas too small to support a large video window. This simple, text-based interface is a powerful browsing tool, ideal for small LCD displays (320×240 pixels). Although this configuration is an effective way to browse a library and make selections, the experience is not as rich, nor as powerful as the previous two touch panel variations.

On Premiere line systems, Kaleidescape provides control panels in the browser interface identical to this standalone touch panel.

This solution has the following requirement:

A Kaleidescape music zone

Figure 3: Standalone touch panel control






Layout for touch panel user interface

Figure 4 outlines the organization of the Kaleidescape touch panel user interface. This layout complements the Kaleidescape OSD and provides an intuitive method to control the Kaleidescape System. Using a consistent implementation of this grid layout across all panel sizes and control platforms improves overall system usability.

Figure 4: Layout for touch panel user interface

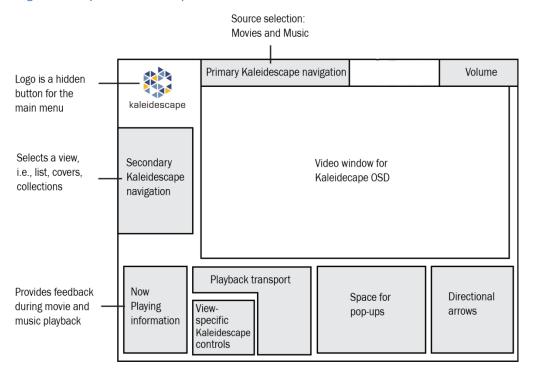

Selecting the Kaleidescape logo accesses the Kaleidescape menu.

Programmers can integrate whole-house controls with the **Volume** buttons located in the upper right.

The secondary Kaleidescape navigation area (located along the left side), has buttons for selecting the movie or music views: List, Covers, and Collections.

The **Now Playing** information (located in the lower left corner) is always visible when browsing music; when browsing movies, this information only appears when a movie is playing.

Playback transports, directional arrows, pop-ups, and other view-specific Kaleidescape controls are on the lower section of the screen.

Keypads

Keypad commands provide a method for controlling music playback from any zone on any Kaleidescape player without requiring control feedback. Although keypad commands were created for keypads, these commands can use any button-like input, a button on a keypad or touch panel, a motion sensor, or any other input device.

Kaleidescape provides two different types of keypad commands.

- Presets
- Music collections

With the keypad presets commands, a keypad can be programmed to play a predetermined music item that can be easily changed by the user.

With the music collections commands, a keypad can be programmed so users can cycle through music items within a music collection.

Using Music Presets

A preset ties a music item in the Kaleidescape System to a keypad button or other input trigger. Any music item can be saved as a preset, and there is no limit to the number of presets that can be used in a system. The same music presets can be used throughout an installation, or each zone can have a separate set of presets. Presets can be set in any manner useful for the installation. For example, a button designated My Music can be set in the family room that plays the same music preset as any other My Music button in the installation.

Alternately, every keypad in an installation can have unique presets assigned to each individual button. In this scenario, setting a music preset to the first button in the family room does not affect buttons on the kitchen keypad. These approaches can be combined. A set of rooms can share a set of presets. For example, the breakfast nook, hallway, and entryway can all share one set of presets, while each child's room has unique presets.

Music items in the Kaleidescape System

The Kaleidescape System treats several different music items as playable. The following table defines these items and the effect of the random and repeat settings on each item.

Table 1: Music items

Item	Description	Example	Random	Repeat
Single track	Any single track on any album	Hey Bulldog by the Beatles	Only the single track plays	Can be repeated
Album	Any single album	Abbey Road by the Beatles	Can be played randomly	Can be repeated
Mix album	User-defined album that can contain any tracks or albums	My Favorite Jazz	Can be played randomly	Can be repeated
Artist	All music tracks performed or composed by the artist, no matter what album the track is on	The Beatles	Always random	Always repeats
Classical Composer	All music tracks composed by the artist, no matter what album the track is on	Maurice Ravel	Always random	Always repeats
Classical work	Single classical work, incorporates all tracks into a single music item	Piano Concerto in G Major by Maurice Ravel	Can be played randomly	Can be repeated
User-defined collection	All tracks from any albums, mix albums, artists, genres, or classical composers in a user-defined collection	My favorites	Always random	Always repeats
Genre	All music tracks in the genre	Jazz	Always random	Always repeats
All music	All music on all albums		Always random	Always repeats

Random and repeat

In the Kaleidescape System, some music items always play in random order and repeat. These music items include any genre, artist, composer, user-defined collection, and all music.

When any of these items are saved to a preset and played, the item plays in random order starting with a random track. If the preset is selected again, a new random track plays. This setting removes the requirement to use a next track button to skip a track within the selection. For example, if a preset button is programmed to play the Jazz genre every time that button is pressed, a randomly selected Jazz track starts playing. If the user does not care for the current track, the user can simply press the button again to hear a different track. A Beatles button, a Mozart button, a My Favorites button, or an All Music button behaves the same way.

The most recent random and repeat settings in a Kaleidescape zone control how albums, mix albums, and single tracks play from a preset. To control how these items are played back, the random and repeat settings of the zone can be changed with the SATP interface, the OSD interface, or through the programming interface.

Tags and the Preset ID

Most radio tuners have presets, typically using numbered buttons to define each one. For instance, **Button 1** can be WKRP, **Button 2** can be WNPR, and so forth. The Kaleidescape System uses a text tag instead of a physical button. Each preset is defined by a tag associated with a music item in a system-wide table.

To simplify creating of presets, the Keypad Presets module uses a Preset ID parameter to generate tags. A Preset ID can refer to a location or function. For instance, a Preset ID like *Kitchen* can be used to create presets for the kitchen music zone. A module with a Preset ID like *Country* can be used to program the same button on all keypads in the installation to play Country music. For example, a Preset ID named *My Favorites* can be used to create a *My Favorites* music button on multiple keypads. This means the user can set the type of music the button plays. The user can set the preset to play the genre Jazz, the sub-genre Dixieland, or even a favorite mix album.

The Preset ID is appended with the module preset channel number to create the final tag used by the module. In other words, if the module is programmed with the Preset ID *Kitchen*, the module's first preset channel uses the tag *Kitchen1*, the second preset input uses *Kitchen2* and so forth. For two virtual devices to share the same presets, simply give the virtual devices the same Preset ID. To create separate presets for each virtual device, assign different Preset IDs.

Tags are currently not visible to end users, but might be displayed on the onscreen display or browser interface someday, so be sure to name Preset ID appropriately.

Zones

Presets are shared between all zones on all players in the system. A preset saved on one music zone can be used anywhere in the system. The Keypad Presets module must to be tied to a specific zone. A CPDID and a Zone ID must be assigned in the module to associate the presets with a player and zone in the system. See *Programming* on page 18 for more information.

Saving presets

To save a preset, the music item must be played first from any control interface — the OSD with an IR remote, an SATP touch panel, or even the control panels available on the browser interface. Once the music is playing, press and hold the keypad button for a few seconds to set the preset. The playback mutes briefly to indicate that the preset was successfully saved. Preset modification can be disabled (locked out) through the module.

Any discrete music item can be saved as a preset. An individual track, album, mix album, genre, artist, classical work, classical composer, user-defined collection, or all music can be saved to a preset.

If more than one item is set to play (for example, three albums are queued up in **Now Playing**), only the item currently playing is saved to the preset. There is no need to re-save presets when new content is added to a genre, artist, classical composer, user-defined collection, or mix album. The system plays the entire contents each time recalled, regardless of what tracks were present when the preset was saved.

Preset browsing

The module also provides the ability to browse through the presets in numerical order. There are three controls provided for this activity: first, next, and previous. If a specific preset has not been defined, that preset is skipped and the next defined preset is activated.

Preset feedback

Each preset in the module is associated with a descriptive text label identifying what is saved to that preset. For example, if the user saves the genre Jazz to a preset, then Jazz becomes the preset label. If the user saves music by Queen or the Alice in Chains album Facelift to a preset, then the preset label becomes Queen or Alice in Chains – Facelift respectively. These labels can be used on keypad character displays or touch panels to identify the status of a preset button.

The module also reports information about the currently selected music entity using the **Now Playing Item** output. If a preset is currently playing, the label associated with that preset is displayed.

Collection browsing

A set of buttons can be programmed to browse through the items in a music collection. Any music collection (Albums by Artist, Albums by Title, Artists, Genres, Mix Albums, Classical Composers, Classical Works, New, or any user-defined collection) can be specified. The module provides three controls for browsing: first, next, and previous. These controls step through the collection in the order displayed on the OSD.

Music collections currently available in the Kaleidescape System are described in the following table.

Table 2: Current Kaleidescape music collections

Item	Description (of system contents)	Alphabetical sort order	First tem
Albums by Artist	All albums	Artist name, then album title	All music
Albums by Title	All albums	Album name	All music
Artists	All artists	Artist name	All music
Classical composers	All classical composers	Composer name	All classical music
Classical works	All classical works	Work name	All classical music
Genres	Top 40 genres	Genre name	All music
Mix Albums	All user-defined mix albums	Mix album name	First mix album
New	Most recently imported albums. The time period for considering an album new can be set in the browser interface.	Album name	First new album
User-defined	Collection of any music items defined by the user	Item name	All in this collection

As more music collections are added to the Kaleidescape System, the keypad commands are also able to browse the collections.

Example

If the user wants to step through every album in the Kaleidescape System, define a set of buttons to step through the Albums by Artist collection. When the user presses the First Album button, all music plays. This is because the first item on the Albums by Artist collection is All music. If the user subsequently presses the Next button, the first album by the first artist plays, since the collection is sorted alphabetically by artist name.

The controls in the keypad music collections module operate independently from other methods for choosing music to play. When a user presses the **Next** button for a collection, the next item relative to the last item played from the keypad, always plays. For example, the system has three artists, ABBA, The Beatles, and The Cars. While listening to ABBA, the user presses the **Next Artist** button on the keypad to skip from ABBA to The Beatles. A little while later, the user selects **ABBA** from the onscreen display. The next time the user presses **Next Artist** on the keypad, The Cars starts playing, even though the user might expect The Beatles to start playing.

Programming

Kaleidescape command protocol

Kaleidescape System control is based on bidirectional ASCII string commands. All Kaleidescape components respond to commands from a Crestron controller and provide feedback in ASCII format. Although understanding the details of Kaleidescape command protocol is not required for Crestron programming, it is important to understand how these commands are routed in the Kaleidescape System.

The first field in the command string identifies the Kaleidescape component to which the command is being sent or from which feedback is being received. This device field can have two variables that also appear in module settings and settings made in the browser interface.

The first variable is the device id, which identifies the Kaleidescape component. On Premiere line systems, this is usually the **Control Protocol Device ID(CPDID)** or may also be the serial number of the component. Alto and Cinema One (2nd generation) do not support CPDIDs

Note: The Crestron modules only support CPDID routing.

The second variable is Zone ID, which identifies the movie or music zone to be controlled.

Note: There are a few commands intended for a 1U, 3U or 5U Server, but these commands are generally limited to IP address recovery commands, and are not useful for the Crestron system.

Device ID

Every command and response begins with a device ID which can be a Control Protocol Device ID (CPDID) or the serial number of the component to be controlled.

In installations that do not require command routing, the default CPDID *None* (01 in the ASCII command) is used for all Kaleidescape components. Do not change the default CPDID *None* unless the installation requires command routing.

The CPDID routes commands to the intended zone. The Kaleidescape module verifies receipt of a valid response from the targeted zone by comparing the CPDID of the command and response.

For example, if CPDID 02 is assigned to an M500 Player, the PLAY command has the following format.

```
02/1/PLAY:\r
```

A command beginning with CPDID *01 (None)* always controls the component that receives the command directly, either via the RS-232 port or TCP/IP, regardless of the CPDID setting of the component.

If the installation requires command routing, a unique CPDID for each controlled component must be set in the browser interface. Kaleidescape modules include a field for entering corresponding CPDIDs.

Kaleidescape music zones

Some Kaleidescape components have more than one music zone. For example, the Kaleidescape Music Player incorporates four music zone outputs, each of which must be controlled independently.

To control the four music zones, the device field includes a Zone ID (01–04) that identifies the music zone to which the command is targeted. Each music zone behaves as a separate endpoint. Commands that target Zone ID 01 do not usually affect Zone ID 02 and so on. (Power on/off commands affect all four zones.)

For example, if CPDID 06 is assigned to a Music Player, the PLAY command intended for Zone ID 03 has the following format.

```
06.03/1/PLAY:\r
```

Music commands addressed to the single zone of a M500 Player always use Zone ID *01*.

Kaleidescape modules that control music zones include a field for entering a CPDID and a field for entering the Zone ID.

Kaleidescape modules

Kaleidescape provides five different types of control modules:

- OSD module (Onscreen display control)
- SATP module (Standalone touch panel control)
- Keypad Presets module
- Keypad Music Collections module
- Controller Zone Name module

All modules can use either RS-232 or TCP/IP for control. (See *Appendix B: RS-232 Port Configuration and Cable Pinout* on page 65 for RS-232 pinout.) Always download the latest versions of the modules before beginning a project or revising an existing program.

OSD, SATP, and Keypad Presets modules each contain a set of transports: PLAY, STOP, PAUSE, FAST FORWARD, REWIND, NEXT, and PREVIOUS.

These commands behave differently with the SATP and Keypad Presets module than with the OSD module. For example, in the OSD module, the STOP input clears the screen saver if running, clears a pop-up if showing, or stops music when Now Playing is shown on the active screen. With the SATP or Keypad Presets modules, the STOP input always stops the music no matter what is shown on the OSD.

Basically, transport commands in the OSD module control the OSD, which then controls movies and music. Transport commands in the SATP and Keypad Presets modules only control the music currently playing.

OSD module (Onscreen display control)

The Kaleidescape OSD module works with either the OSD Video or OSD No Video template and is used to control a Kaleidescape movie zone. Kaleidescape recommends using a touch panel with video for the best user experience. For more information on the inputs, outputs, and parameters of the OSD module, see *Appendix C: OSD Module v8.4.0 Parameters and I/O* on page 66.

SATP module (Standalone touch panel control)

The Kaleidescape SATP module provides standalone touch panel control when a display is not visible or the user wants to play music without turning one on. In these cases, the touch panel provides a standalone interface for a music zone. When used with a zone that supports both movies and music (for example, the single zone from an M500 Player) this module does not affect the OSD and provides a completely independent method for controlling the zone. The SATP module is designed to work with the SATP template.

The Kaleidescape SATP module does not control movie selection or playback. This module cannot be used with players that do not support music playback. For more

information on the inputs, outputs and parameters of the SATP module, see *Appendix D: SATP Module v8.4.0 Parameters and I/O* on page 86.

Keypad Presets module

The Keypad Presets module provides simple control for music playback from a keypad. The Keypad Presets module associates music items in the system with keypad buttons. Although designed for keypads, any input can be used to trigger a preset and presets can be incorporated into touch panel designs. This module cannot be used with players that do not support music playback. For more information on the inputs, outputs, and parameters of the Keypad Presets module, see *System Readiness State*

[System_Ready] Indicates that the Kaleidescape system is ready.

 $\hbox{\tt [System_Becoming_Ready]} \qquad \hbox{\tt Indicates that the Kaleidescape system is}$

becoming ready from an idle state.

[System_Not_Ready] Indicates that Kaleidescape system is idle.

Appendix E: Keypad Presets Module v7.1.0 Parameters and I/O on page 92.

Keypad Music Collections module

The Keypad Music Collections module allows a user to browse through a collection with three simple controls: FIRST, NEXT, and PREVIOUS. This module cannot be used with players that do not support music playback. For more information on the inputs, outputs, and parameters of the Keypad Music Collections module, see [System_Ready] Indicates that the Kaleidescape system is ready.

[System_Becoming_Ready] Indicates that the Kaleidescape system is

becoming ready from an idle state.

[System_Not_Ready] Indicates that Kaleidescape system is idle.

Appendix F: Music Collection Module v7.1.0 Parameters and I/O on page 95.

Controller Zone Name module

The Controller Zone Name module works with instances of the Kaleidescape App for iPad that have been configured with a controller zone name. Use of a controller zone name allows volume commands to be easily routed to multiple zones (individually or simultaneously) by determining the iPad on the local network that sent the command. For More information on the inputs, outputs and parameters of the Controller Zone Name module, see *Appendix G: CZN Module v 8.4.0 Parameters and I/O* on page 96.

Importing modules

Downloading and extracting Kaleidescape modules and templates for Crestron

Use the following steps to download and extract the Kaleidescape modules and templates for the Crestron system:

- Download the Kaleidescape modules and templates for Crestron ZIP file (Download all Crestron files) from the Support page on the Kaleidescape website (www.kaleidescape.com/support).
- Extract the files from the ZIP file to the C:\Crestron\Simpl\PROGRAMS\
 folder.

Module contents

Each module consists of three types of files.

- SIMPL Windows UMC file
- SIMPL+ USP file
- SIMPL+ USH file

The SIMPL+ files are not intended for direct use in a program, but are used as a processor for the accompanying UMC file.

Note: Kaleidescape modules for Crestron are designed to be used with the latest version of SIMPL Windows. Verify that the most recent version of SIMPL Windows is installed.

File names indicate the current version of the module, indicated by X's in the file names below.

The Kaleidescape OSD module consists of three files.

- Kaleidescape OSD vX.X.X.umc
- Kaleidescape OSD Processor vX.X.X.usp
- Kaleidescape OSD Processor vX.X.X.ush

The Kaleidescape SATP module consists of three files.

- Kaleidescape SATP vX.X.X.umc
- Kaleidescape SATP Processor vX.X.X.usp
- Kaleidescape SATP Processor vX.X.X.ush

The Kaleidescape Keypad Presets module consists of three files.

- Kaleidescape Presets vX.X.X.umc
- Kaleidescape Presets Processor vX.X.X.usp

Kaleidescape Presets Processor vX.X.X.ush

The Kaleidescape Keypad Music Collections module consists of one file.

Kaleidescape Music Collections vX.X.X.umc

The Kaleidescape Controller Zone Name module consists of nine files.


- Kaleidescape Multiple Zone Volume vX.X.X .umc
- Kaleidescape Initializer for CZN volume control vX.X.X.usp
- Kaleidescape Zone Volume Pre-Processor vX.X.X.usp
- Kaleidescape Zone Volume event Processor vX.X.X.usp
- Kaleidescape Zone Volume feedback Processor vX.X.X.usp
- Kaleidescape Initializer for CZN volume control vX.X.X.ush
- Kaleidescape Zone Volume Pre-Processor vX.X.X.ush
- Kaleidescape Zone Volume event Processor vX.X.X.ush

Kaleidescape Zone Volume feedback Processor vX.X.X.ushlt is not necessary to import the module to use the sample programs.

Automatic import


The import mechanism in SIMPL Windows can be used without unzipping the file. Select **File**, then **Import an Archived Program** as shown in the following figure.

Figure 5: SIMPL Windows import mechanism

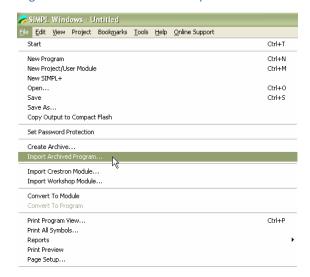

The user module and SIMPL+ program must be copied to the same directory as shown in the following figure.

Figure 6: Module location

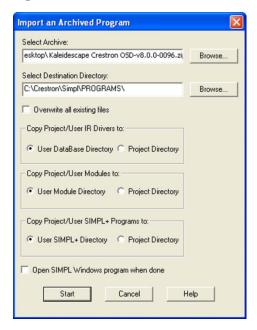

Module version number

The module version number identifies changes both internally and in the interface. The version number of a module is presented in the following format:

```
(major).(minor).(patch)
```

The major version number references major API changes, such as the removal or addition of signals to the module.

The minor version number changes with any change to the behavior of the module, or if there are minor modifications to the interface. Changes in the minor version number indicate that the program might need modification when updating to this module.

Changes to the patch number indicate that there are no outward changes to the module and updating the module should not require any program changes.

Example

Consider a module with the version number of 9.2.0. This module can have a different interface than version 8 or earlier, and will probably require changes in the program if updating from an earlier version. If version 9.2.1 were released, upgrading from 9.2.0 should be easy and there should be no outward changes. If version 9.3.0 were released, updating from either 9.2.0 or 9.2.1 might require program changes.

Kaleidescape strives to minimize interface changes. Most changes are new inputs or outputs or slight name changes on existing inputs or outputs.

Updating the modules

Changes in the major or minor revision number are likely to have interface changes that can affect an existing program, and new inputs and outputs might need reconciling. Depending on the subset of the signals used in the installation, these new controls can often be ignored.


After updating, open up the program in SIMPL Windows and choose **Project** and **Re-Synch Program** to get the new changes.

To update old modules, copy the signals from the existing modules to an instance of the new module. Use the following steps to update OSD modules. The same process can be used to update SATP and Keypad Presets modules.

- 1. Open the Crestron Project and OSD Demo.smw file with the new OSD module.
- Use the Copy and Paste commands to add a new OSD module for every OSD module in the project.



3. Right-click on the module to be updated and drag the module over the new OSD module.

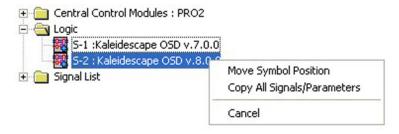

- 4. Select Copy All Signals/Parameters from the pop-up menu.
- 5. Click **OK** in the confirmation dialog box.



- 6. Delete the old module.
- 7. Repeat steps 3 through 6 for all the OSD modules to be updated.

Scalability

The complexity of the Kaleidescape modules is demanding on a Crestron processor. A single, dedicated Crestron CP2E can support the following modules:

- Up to 15 OSD modules;
- Up to 15 SATP modules with five users actively browsing; OR
- Over 90 keypad modules.

System builder

Imported modules are not currently compatible with System Builder. To be used in System Builder, the modules and templates must be modified. To make this process easier, virtual connection logic and device support definitions have been included in the modules.

Connection methods

All Kaleidescape players can be controlled via a TCP/IP connection over Ethernet — some can also be controlled via an RS-232 connection. Alto, Cinema One (2nd generation), and Kaleidescape Mini Players such as the KPLAYER-300 and KPLAYER-M300 do not have an RS-232 port and must be controlled via IR or TCP/IP connection. In a Crestron control system, the Kaleidescape modules do not distinguish between these two connection methods; the protocol is identical.

Kaleidescape recommends using TCP/IP over Ethernet for control connection in most cases. TCP/IP over Ethernet offers several advantages over RS-232:

- Very high bandwidth compared to RS-232
- Error detection and correction
- Standard Cat5/5e/6 cable and pinout (simple standard termination) usage
- Longer cable runs possible
- Only a single network port required
- No extra COM port cards needed

Bandwidth can be a key issue, especially in multi-zone systems. Text-based feedback from several zones can cause noticeable response latency over an RS-232 connection. This is especially critical when using command routing to control multiple Kaleidescape components through a single RS-232 port.

There are some installations that require RS-232. If controlling the power state of an older Movie Player is an issue, RS-232 might be the only option. M-Class players, the 1080p Player, 1080p Mini Player, Movie Player 2, Music Player, Cinema One, and Alto can be powered on from TCP/IP over Ethernet commands. For more information on controlling power states, see *Power control* on page 38.

RS-232 control can be used if the Crestron processor does not have an Ethernet port or the optional Ethernet card.

Programming options

In addition to direct physical connections through RS-232 or Ethernet ports, there are other methods of combining Crestron programming with Kaleidescape commands. There are several methods of connecting Kaleidescape module signals to other device modules. The Kaleidescape control protocol also allows for routing commands indirectly, through a single physical connection, to any Kaleidescape player or server (command routing).

The following table illustrates how physical connections work with Crestron and Kaleidescape programming options (listed in order from highly recommended to least recommended).

Table 3: Connections between Crestron and Kaleidescape

Method	Diagram		Description
Multiple TCP/IP clients	Recommended Module TCP/IP Client — Module TCP/IP Client — Module TCP/IP Client —	Server Player Player Player	Each player is associated with the Kaleidescape module through the player's individual TCP/IP client. Pros: Good control flexibility and throughput Cons: Several TCP/IP clients to manage. Cannot power on the older KPLAYER-2000 or KPLAYER-2500.
Multiple RS-232 ports Command routing with a single TCP/IP client	Module RS-232 Module RS-232 Module RS-232 TCP/IP Client — Module Module Module	Server Player Player Player Server Player Player Player Player	Each player has a direct connection to an RS-232 port on the controller. Pros: Best control flexibility and fair throughput. Cons: Limited distances, might require additional RS-232 ports. Kaleidescape module signals are jammed together through a single TCP/IP client. Pros: Easier to program, good throughput. Cons: Places extra load on Crestron processor. Cannot power on a player.
Command routing with a single RS-232 port	Module Module Module	Server Player Player Player	Kaleidescape module signals are jammed together through a single RS-232 port. Pros: Single RS-232 connection. Cons: Places extra load on Crestron processor. Poor throughput and limited distances. Cannot power on a player.

All of the methods in Table 3 can be used in the same installation depending on factors such as the cable run length to players, the Crestron processor, and the number of players in the installation.

Command routing

Command routing allows control of multiple Kaleidescape players with only one connection to the controller. This can be either a TCP/IP or an RS-232 connection to almost any player or server in the system. While command routing can be the best solution for some installations, there are also inherent limitations and should be used only if required by the installation.

- If the Crestron controller has a dedicated RS-232 port for each Kaleidescape player or if direct TCP/IP communication can be established with each player, command routing is not required.
- If several players must be controlled through a single RS-232 port, or a single IP address must be used for Crestron communications with the Kaleidescape System, command routing is required.

Command routing via TCP/IP

In some installations, it is impossible to make a TCP/IP connection to each player. For example, the network administrator may have isolated the Kaleidescape System on a separate network behind a NAT router and only a single IP connection is available. Or, maybe the network administrator has only provided for a single static IP address, and all other components are using dynamically assigned IP addresses (addresses potentially changing with each power cycle or power outage).

For these types of installations, it is possible to route all communications through a single TCP/IP client. This forces the Crestron processor to work harder than necessary and can slow down the system — especially if the program uses multiple SATP modules. Using a single IP address and command routing introduces a single point of failure. If the Kaleidescape component with connection to the controller loses power or if replaced by a new component with the wrong IP address, control of the entire Kaleidescape System is lost. These network topologies are not recommended for Kaleidescape Systems and should be avoided if possible.

If a single IP address must be used, change the TX\$ of every module to use the same signal name (jamming them together). Do the same for the RX\$ and Connection-F signals of every module. Then configure one TCP/IP client to use the same TX\$, RX\$, and Connection-F signals. This change routes all the TX\$ and RX\$ signals through that one TCP/IP client.

Although the TCP/IP client can connect to any Kaleidescape player to control any or all zones in the system, control of those zones is lost if that player is turned off. To avoid this potential problem, connect directly to a server when using command routing because the server generally stays powered on all the time. If there are

multiple servers in the system, the additional servers can be left out of the control programming.

Command routing via RS-232

Instead of using a TCP/IP client, all the communications can be routed through a single RS-232 port. As above, connecting through the Kaleidescape server is recommended. However, command routing through the RS-232 control port can cause latency in some cases because of the limited bandwidth of the RS-232 port and is not recommended.

If a single RS-232 connection must be used, change the TX\$ of every module to use the same signal name (jamming them together). Do the same for the RX\$ and signals of every module. Then configure one RS-232 port to use the same TX\$ and RX\$ signals. This routes all the TX\$ and RX\$ signals through that one RS-232 port.

Setting the Control Protocol Device ID (CPDID)

CPDIDs are set for Kaleidescape Premiere line components on the component settings page of the browser interface. The CPDID of the OSD, SATP, or Keypad module must also be set to match the player being controlled. Do NOT assign the same CPDID to more than one device. Valid CPDID numbers for command routing range from 02 to 99. Setting CPDID None in the browser interface means that command routing is not being used for that device. Kaleidescape players set to CPDID None must have a direct connection to the controller (via RS-232 or TCP/IP). The Crestron module must then be set to CPDID None to communicate with the device directly connected.

For example, if using command routing via an RS-232 connection to a 3U Server, the server responds to requests sent to CPDID *None* and routes commands with other CPDIDs to the components with assigned unique CPDIDs.

CPDIDs are not a feature of Alto or Cinema One (2nd generation).

Use the following steps to assign a CPDID to a Premiere line component.

1. Open the browser interface using:

http://my-kaleidescape/ (Windows) http://my-kaleidescape.local/ (Mac)

- 2. Select the SETTINGS tab.
- 3. Click on **COMPONENTS** in the second row of tabs.
- 4. Click on the **Settings** button for the player.

Figure 7: Component Settings button



- 5. Select the **CONTROL** tab from the **Settings** page.
- Select the Control Protocol Device ID (None, 02 through 99) from the dropdown menu.

Select *None* only if command routing is NOT used for this device as shown in the following figure.

Figure 8: Control tab




8. Click **OK**. The device does not have to be rebooted.

CPDID addressing example


In the example illustrated in Figure 9, a Crestron controller is connected to a 1U Server either via Ethernet or the RS-232 control port. Unique CPDIDs are assigned (in the installer pages of the browser interface) to four M500 Players and one Music Player. The Music Player has four music zones controlled independently with the addition of Zone IDs. Because the 1U Server connected to the Crestron controller is the local device, the server uses the default CPDID *None*. The second 1U Server does not have to be controlled, so that CPDID is left at the default CPDID *None*.

Figure 9: CPDID addressing example

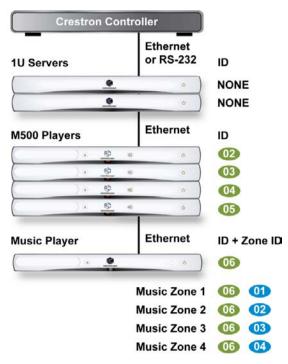

Each of the M500 Players is controlled from a Kaleidescape OSD module. The OSD modules must be configured to match the CPDIDs assigned to the players in the browser interface. The field for the CPDID is near the bottom of the module.

Figure 10: Configuring the module CPDID

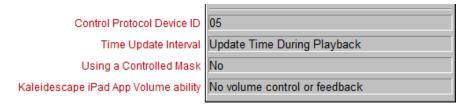


If the controller directs the M500 Player to play a selected movie, the OSD module sends the following text command to the server:

02/1/PLAY:\r

The server receives the command and reroutes the command to the player with the CPDID 02 via TCP/IP over Ethernet. The response from the player is directed through the server back to the OSD module with the CPDID 02.

With the Music Player, a separate SATP or keypad module must be used for each controlled zone as shown in Figure 11. All SATP and keypad modules for the same player are assigned the same CPDID (06 in the example) but the Zone ID (01 through 04) must also be set. The SATP and keypad modules send every command with the CPDID followed by the Zone ID. This identifies each music zone as a separate, routable endpoint.

Figure 11: Configuring the module CPDID with Zone ID

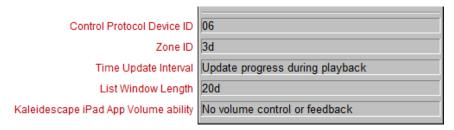

If the controller directs the Music Player to play the selected music in zone 3, the SATP module sends the following text command:

06.03/1/PLAY:\r

The 1U Server receives the command and reroutes the command to the Music Player (CPDID 06) via TCP/IP over Ethernet. The Music Player identifies the Zone ID of the command and plays back music in zone 3. The response is directed through the 1U Server back to the SATP module for zone 3.

Note: If command routing is not used, the Zone ID must still be set for the zone that the SATP or keypad module will be controlling.

This example has the Crestron processor connected to the 1U Server, but this process works just as well if the Crestron processor is attached to one of the M500 Players.

Note that CPDID 01 always sends commands to the directly connected device. If the Crestron processor were connected to the M500 Player with CPDID 02, any messages sent with CPDID 01 are captured by that player and not routed to any others. In this case, both 01 and 02 are correct values for the module CPDID parameter. A direct connection to the controller is the only way to communicate with a component whose CPDID is set to None.

For more information, see the *Kaleidescape System Control Protocol Reference Manual* on the Support page of the Kaleidescape website (www.kaleidescape.com/support).

Music zone control

Music zone control provides control for any music zone in a Premiere line system from the OSD for a movie zone. Setting music zone control in the browser interface allows the user to select any zone from the movie zone onscreen display. **Now**Playing shows what is playing in the currently selected zone.

Music zone control is not supported on Cinema One (2nd generation).

Naming music zones

Music zone names appear in the OSD to identify the controlled music zone. It is important to give the music zones names that can be easily understood by the user, like Den, Living Room, or Patio.

Use the following steps to name music zones.


1. Open the browser interface using:

http://my-kaleidescape/ (Windows) http://my-kaleidescape.local/ (Mac)

- Select the SETTINGS tab.
- 2. Click on **COMPONENTS** in the second row of tabs.
- For each component, enter a music zone name in all Zone # Name (for music)
 field and then click OK to save. Each name must be saved before the music
 name for the next component can be entered.

Note: If a zone is named *Unused*, that zone does not appear as an option on the OSD selection.

Figure 12: Components Settings page

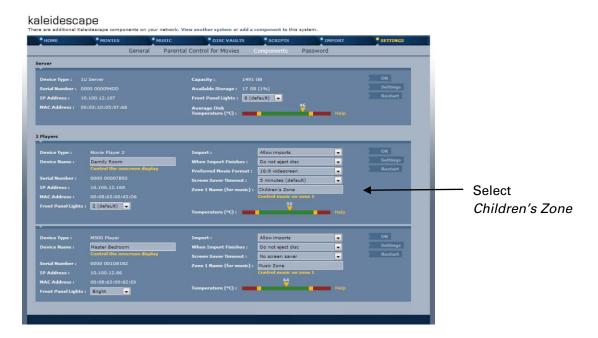

Controlling music zones

Use the following steps to set music zone control.

1. Open the browser interface using:

http://my-kaleidescape/ (Windows) http://my-kaleidescape.local (Mac)

- 2. Select the **SETTINGS** tab as shown in Figure 13.
- Select Any music zone in the system can be controlled from the onscreen display radio button.

Figure 13: General Setting's page




4. Click Save Changes.

Music zone selection


Using the OSD, the user can select the **Control Zone** option in the **Now Playing** view as shown in the following figure.

Figure 14: Now Playing view

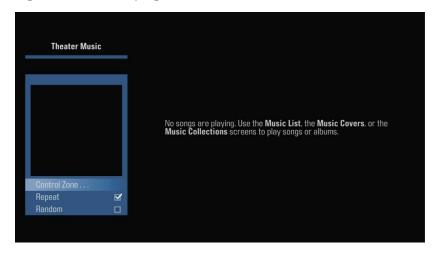

When the user selects **Control Zone**, the **Select Music Zone** dialog box appears with all the available music zones in the system, labeled with the names assigned in the Kaleidescape browser interface.

Figure 15: Select Music Zone dialog box

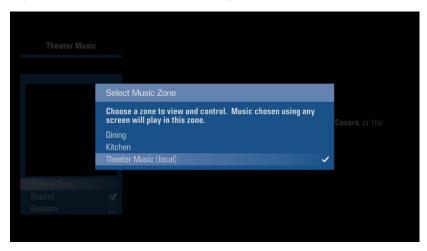

If the OSD is not controlling the local zone when the user selects new music for playback, a reminder that control is for a different music zone will appear. The user then has the option to confirm playback or to select another music zone.

OSD module music zone selection

The zone that the OSD is controlling can be set in the Kaleidescape OSD module. Control can be specified by using either the CPDID or serial number of the component. Note that this feature functions whether or not the CPDID is set. Because either CPDID or serial number can be used, the module also provides feedback using both CPDID and serial number when stating which music zone the OSD is currently controlling as shown in the following figure.


Figure 16: OSD module music zone control



CPDID control

To select which zone to control using the component CPDID instead of the serial number, simply substitute the CPDID for the serial number in the strings, and take the feedback from the [Controlling_CPDID.Zone\$] output of the module. For instance, to control zones 1 and 2 of a Music Player with CPDID 05, use the numbers in the following figure.


Figure 17: OSD music zone control using a CPDID

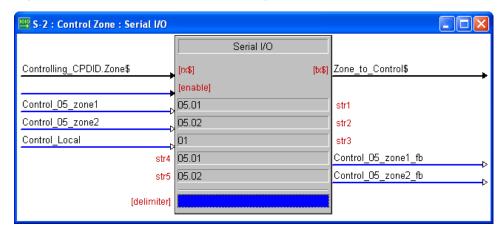

Serial number control

To select which zone to control using the component serial numbers, setup a **Serial I/O** with the serial numbers and Zone ID of the music zones that the OSD is to control. Figure 18 shows how to use a component serial number to initiate control.


Figure 18: OSD music zone control using a serial number

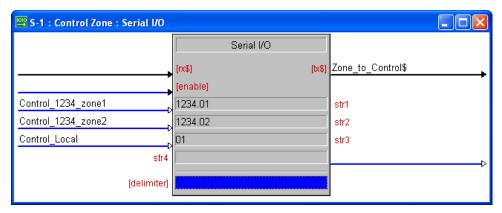

On the rising edge of the signal Control_1234_zone1, the OSD begins controlling music of the first zone of the component with serial number 1234. On the rising edge of the signal Control_1234_zone2, the OSD begins controlling the second zone of the component with serial number 1234. On the rising edge of Control_Local, the local movie zone is controlled again. Note that 01 always refers to the local zone.

To obtain feedback as to which serial number and zone the OSD is currently controlling, use the <code>Controlling_SN.Zone\$</code> output as shown in the following figure.


Figure 19: OSD music zone using serial number

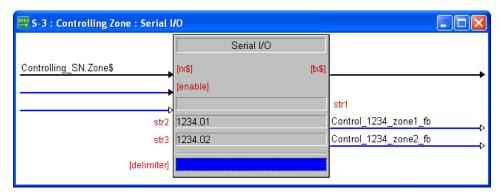

The $Control_1234_zone1_fb$ signal is high while the OSD is controlling zone 1 of component 1234 and the $Control_1234_zone2_fb$ signal is high while the OSD is controlling zone 2 of component 1234.

In an actual program, these functions are usually combined into a single Serial I/O symbol.

Figure 20: Serial I/O Control and Feedback functions combined

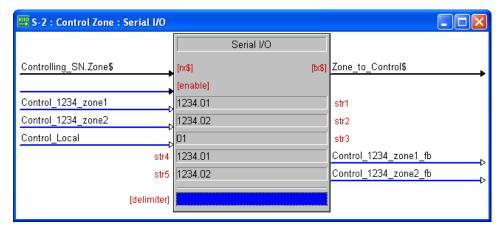

Controlling a movie zone with both SATP and OSD control

To use both the standalone touch panel (SATP) and the onscreen display (OSD) interface to control a movie zone, like the single zone output of an M500 Player, the user can select music from a touch panel without turning on the video display. The best approach for this scenario is to imagine that the single zone is actually two different devices: one is an OSD-controlled movie zone which can play movies or music, and the other is an SATP-controlled music-only zone. Both SATP and OSD No Video templates must be loaded onto the touch panel. These templates are designed as a single page to allow the templates to reside on the same touch panel. The single page design makes it easier to integrate Kaleidescape templates into a larger user interface file on the touch panel.

Both modules can use the same connection with TX\$ and RX\$ signals jammed together, but the better method is to isolate the two different modules onto individual TCP/IP clients. In this case, the two TCP/IP clients use the same IP address, and the modules use the same CPDID.

Use buffers or other methods to separate devices on a touch panel. Remember to add a **Make String Permanent** symbol to keep the serial strings that are not routed in memory.

Calibrating the touch interface

If using the OSD Video template, the touch panel interface must be calibrated to enable the user to touch the video feed. This calibration is in addition to the calibration of the Crestron touch panel itself.

Once the system is functioning, press the Kaleidescape logo in the upper left corner of the OSD touch panel to bring up the **Kaleidescape menu**. On a Premiere line system, highlight **System**, select **Status** and then use the left/right arrows to select **System Setup**. On Alto and Cinema One (2nd generation), highlight **System** then select **Settings** and then use the up/down arrows to select **Advanced**. From there, select the **Calibrate Touch Panel** entry and follow the instructions.

Calibration information is stored in the player itself. Each zone used for OSD Video control must be calibrated.

Power control

Whether to connect to a component via RS-232 or TCP/IP might be determined by how the power state of the component is managed. Both connection types support power off (ENTER_STANDBY) commands, but not all components can respond to a power on (LEAVE_STANDBY) command over TCP/IP. Power on commands work for all M500, 1080p, Music, and Movie Players receiving the command from an RS-232 connection.

Note: Mini players, Alto, and Cinema One (2^{nd} generation) do not have an RS-232 control port.

Power control for the Movie Player (KPLAYER-2000, KPLAYER-2500)

Early model Movie Players cannot be powered on over a TCP/IP connection. When the Movie Player is put in standby mode, the Ethernet port shuts down and the player cannot receive TCP/IP communications. Movie Players connected directly to the controller via the RS-232 control port can be powered on.

With command routing, a serial connection can be made to one player and issue commands that route to a second player. Routed commands travel over the network to the second player. If the second player is in standby mode in this scenario, power on commands routed through the first player will not cause the second player to leave standby.

In some situations, this limitation is not an issue. The Movie Player remembers the last power state and resumes that last power state after a power outage. For example, if the Movie Player is fully powered on when the power is lost, the player automatically returns to the fully powered on state when the power is restored. Additionally, the Movie Player is very quiet (not completely silent because the fan runs as needed) and the noise is usually not noticeable when the player is in a cabinet. In many installations, the Movie Player is always fully powered on.

If the Movie Player has to be powered on from the Crestron controller, there are two options.

- Use RS-232 control without command routing (cable directly connected to the player).
- Use an infrared (IR) emitter to send the IR POWER ON command, but use TCP/IP for all other commands.

Power control for the 1080p Player, 1080p Mini Player, Music Player, and Movie Player 2

The Ethernet port for the 1080p Player, 1080p Mini Player, Music Player, and Movie Player 2 is powered while in standby — but in a limited mode.

If the ENTER STANDBY command is sent to the component over TCP/IP, initially there is no response. After a moment, the network connection drops, and is then re-established. The component is now in limited mode and responds only to a limited set of commands.

When a LEAVE_STANDBY command is received, the component powers on. The network connection drops momentarily and then reconnects. The component is now ready to respond to commands normally. Command routing cannot be used to power on these components. When using TCP/IP, a direct connection must be made to the component to turn the component on.

ENTER/LEAVE_STANDBY commands sent to the Music Player affect all four music zones.

Power control for Cinema One (1st generation)

The standby mode on Cinema One only affects the movie zone and the first music zone of the component. Standby does not affect the second and third music zones. When in standby mode, commands that affect the movie zone or first music zone return error code 020, indicating that the component is in standby mode.

When the ENTER_STANDBY command is sent to Cinema One, the system responds with a DEVICE_POWER_STATE event message indicating the new power state and turns off the movie zone and first music zone. Similarly, Cinema One responds to the LEAVE_STANDBY command by immediately returning to the fully powered-on state and sending another DEVICE POWER STATE message.

Unlike the components listed in the previous section, Cinema One does not drop the TCP/IP connection when entering or leaving standby mode.

Power control for M-Class players

The standby mode on Kaleidescape M-Class players is similar to that of Cinema One (1st generation). If the ENTER_STANDBY command is sent to an M-Class player, the player responds with a DEVICE_POWER_STATE event message indicating the new power state and shuts off.

Similarly, the player responds to the LEAVE_STANDBY command by immediately returning to the fully powered-on state and sending another DEVICE_POWER_STATE message. An M-Class player does not drop the TCP/IP connection when entering or leaving standby mode.

Power control for Alto and Cinema One (2nd generation)

The default standby behavior is similar to Cinema One (1st generation): it responds to ENTER_STANDBY and LEAVE_STANDBY commands, and sends DEVICE POWER STATE events to indicate a change in power state.

Alto and Cinema One (2nd generation) also have a user-selectable option for low power standby mode. If this option is selected, standby mode acts like a full power OFF state and the device will not respond to ENTER_STANDBY or LEAVE_STANDBY commands. When configured to power off these players can be put into and taken out of standby using IR or the front panel power button.

Sample Installation

This section contains a step-by-step implementation of a sample installation that uses direct control, without command routing, via TCP/IP over Ethernet. Although a single TCP/IP client can be used to control the entire system with command routing, this configuration puts an unnecessary load on the Crestron processor. Connecting all modules to one TCP/IP client is inefficient because each module must process all incoming messages. Figure 21 shows the layout of the sample installation.

SUNROOM

SUNROOM

MISIC

FAMILY ROOM

BEDROOM

MOVIES

WINSID

THEATER

MOVIES

MUSIC

Figure 21: Layout for a sample installation

Theater

The Theater has a TPS-15 with video capabilities. The Theater contains a projector, an adjustable screen masking system, controlled lighting, and shades. The M500 Player will be controlled using the OSD module and OSD Video template

Family Room

The Family Room also has a TPS-15 and controlled lights but no masking or shades. The M500 Player will be controlled using the OSD module and OSD Video template.

Bedroom andThe Bedroom and Sunroom each have a TPS-4L to control music zones 2 **Sunroom**and 3 of the Music Player. Each music zone will be controlled with a

separate SATP module.

Master Bedroom The Master Bedroom uses a universal remote to control the local M500

Player.

Kitchen The Kitchen has a TPS-12, but a video cable could not be wired to that

location, so the OSD No Video template will be used. The M500 Player will

be controlled using the OSD module and OSD Video template.

The Kitchen touch panel will also control the dining room music using the

music zone control feature.

This installation requires a total of five virtual devices to be defined.

Three for OSD control of the three M500 Players


Two for two of the Music Player zones

Music zone 1 from the Music Player is unused in this installation.

Assigning static IP addresses

For Crestron processor TCP/IP communications, each player is assigned a separate static IP address using the Kaleidescape browser interface. Figure 22 shows a sample IP address list.

Figure 22: Sample IP address list

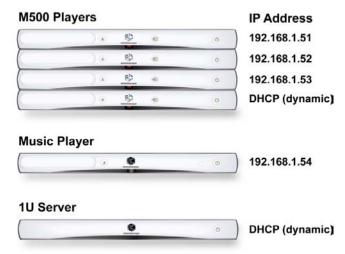

The Crestron processor does not need to control the M500 Player in the Master Bedroom or the 1U Server, so these two components are left to obtain a dynamic address from the DHCP server. These Kaleidescape components are set by default to obtain an IP address from a DHCP server.

To assign static IP addresses, follow the steps below for each Kaleidescape component. Always assign IP addresses outside of the dynamic range set on the DHCP server. Be careful not to assign an IP address already used by some other device in the network.

1. Open the browser interface using:

http://my-kaleidescape/ (Windows) http://my-kaleidescape.local/ (Mac)

- 2. Select the **SETTINGS** tab.
- 3. Click on Components in the second row of tabs.
- 4. Click on the Settings button for the component.
- 5. Select the **NETWORK** tab. Information about the current network configuration for the component is displayed.

Figure 23: Static IP address assignment under the NETWORK tab



- 6. Select the Use the following IP configuration radio button.
- 7. Enter a static IP address and related fields.
- 8. Click OK.

Repeat steps 4 through 8 for each component with a movie or music zone to control.

Note: Each component with new network settings will have to be restarted for the settings to take effect.

Configuring TCP/IP clients

TCP/IP clients must be added to the Crestron program. The sample installation requires two for connecting to music zones 3 and 4 of the Music Player, and three for connecting to each of the M500 Players controlled from touch panels.


Each of the clients must be named and have an IP address assigned corresponding to a M500 Player or Music Player. The M500 Player in the Master Bedroom will be controlled with the IR remote and does not require Crestron programming.

Note: The Kaleidescape sample Crestron programs must be imported BEFORE continuing. See *Importing modules* on page 22 for details.

Use the following steps to add TCP/IP clients to the Crestron program.


 Open SIMPL Windows and click the Configure button to enter the Configure view.

Figure 24: Configure button




2. Drag five TCP/IP clients into the program from the Device Library **Ethernet Control Modules/Ethernet Intersystem/Device Communications** folder.

Figure 25: Device Communications folder

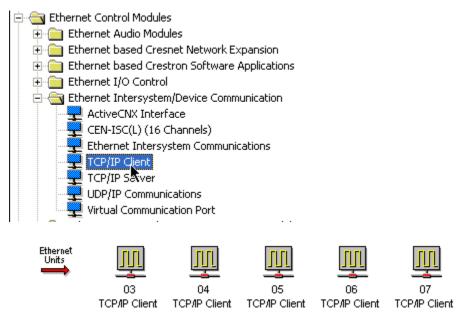


3. Double-click the icon for TCP/IP client to configure. The **Device Settings**: **Crestron TCP/IP Client** window appears.

Figure 26: Device Settings: Crestron TCP/IP Client window

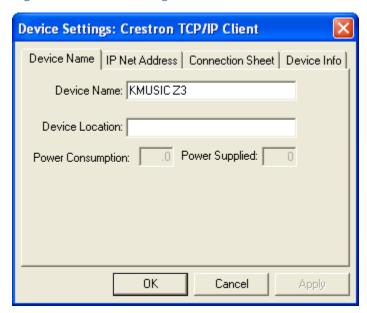

- 4. Enter a descriptive name for the music zone or movie zone TCP/IP client in the **Device Name** text box, for example, *KMUSIC Z3*.
- 5. Enter a descriptive name for the location of the zone in the **Device Location** text box, for example, *KMusic-Bedroom* and *KPlayer-Family Room*.
- 6. Select the IP Net Address tab.
- 7. Enter the corresponding IP address that was assigned in *Assigning static IP addresses* on page 42.

Figure 27: IP Net Address tab

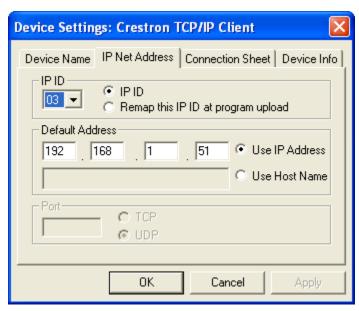

8. Click **OK** to save settings.

9. Repeat steps 3 through 8 for each TCP/IP client. Remember that music zones 3 and 4 share the IP address of the Music Player (192.168.1.54). The TCP/IP clients are now labeled with the device names.

Figure 28: Named devices





KMusic Z3



KMusic Z4








Configuring touch panels

Touch panels must be added to the program and named. The signal names from the TPS-15 samples in the Kaleidescape OSD Demo and Kaleidescape SATP Demo programs are copied later.

Use the following steps to add and name touch panels.

While still in the Configure view, open the Device Library
 Touchpanels/Touchpanels (Cresnet) folder and find the touch panel symbols.

Figure 29: Touch panel symbols

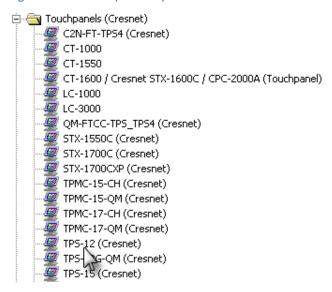

2. Select and drag two TPS-4L, one TPS-12, and two TPS-15 symbols into the **System** view.

Figure 30: Selected touch panel symbols



Select each icon and rename the touch panels in the same manner as the TCP/IP clients.

Figure 31: Renamed touch panels



Programming TCP/IP clients

The communication port must be set and the Connect-F, TX\$, and RX\$ signals renamed for each TCP/IP client.

Use the following steps to enter the port number, and name the TX\$, RX\$, and Connect-F signals.


1. Click the **Program** button.

Figure 32: Program button



- 2. Open the Central Control Modules folder in the Program view.
- 3. Find the TCP/IP client in the Ethernet slot list.
- 4. Open each TCP/IP client and set Port to 10000.
- 5. Set the Connect input to 1.
- 6. Name the Connect-F, TX\$, and RX\$ connections. Use the names shown in the following figure, Kaleidescape_Connect-F, Kaleidescape_TX, and Kaleidescape_RX, so that the signals correspond to the signals copied and pasted from the Demo program modules described in the following section.

Figure 33: Naming the Connect-F, TX\$, and RX\$ signals

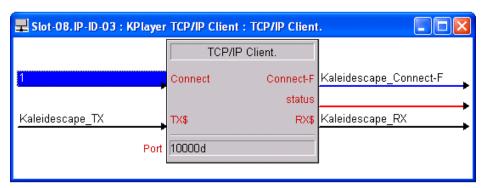

Programming touch panels

Copy the signal names from the generic TPS-15 in the Kaleidescape OSD Demo and Kaleidescape SATP Demo program modules. Then copy the TPS-12 and TPS-15 signals from the OSD Demo program and the TPS-4L signals from the SATP Demo program.

The signals from the TPS-15 in the Kaleidescape OSD Demo program can be applied to any touch panel symbol with video capabilities. In this example, the TPS-15 signals from the OSD Demo program are used for both the TPS-15 and the TPS-12 touch panels. The signals from the TPS-15 symbol in the Kaleidescape SATP Demo program are for touch panels controlling music in zones without video displays.

In this example, the TPS-15 signals from the SATP Demo program are used for the TPS-4L touch panels.

Use the following steps to copy signal names from TPS-15 in the demo modules.


- 1. Open a new instance of SIMPL Windows.
- 2. From the File menu, open the Kaleidescape OSD Demo program.
- 3. Click the **Program** button.

Figure 34: Program button



- 4. In the **Detail** view, scroll to the TPS-15 symbol. Copy the digital input signals.
- 5. Select the first input signal and press **Shift-End** to highlight all the digital input signals.
- 6. Press Ctrl-C to copy.
- 7. Return to the program and open the Kitchen touch panel in the Detail view.
- 8. Select the first digital input signal and press Ctrl-V to paste the signals. The Preserve Unconnected Signals? window appears.

Figure 35: Preserve Unconnected Signals? window

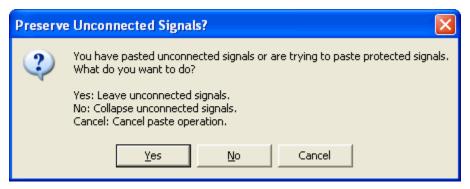


9. Click Yes. The Expand Symbol? window appears.

Figure 36: Expand Symbol? window



- 10. Click Yes. If a prompt appears to name unconnected signals, click No.
- 11. Return to the Kaleidescape OSD Demo program and repeat steps 4 through 10 for the remaining input and output signals: digital, analog, and serial.
- 12. Copy all the signals from the Kitchen TPS-12 that was just created.
 - a. Select the touch screen symbol in the Program view.
 - b. Right-click and drag the symbol over the Family Room symbol. A menu appears.

Figure 37: Copy/Move menu

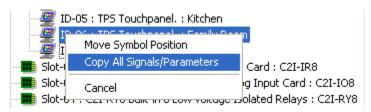

- c. Select Copy All Signals/Parameters.
- d. Repeat for the Theater touch panel.

The **Bedroom** and the **Sunroom** touch panels use the signals from the SATP Demo program. The procedure is the same except that the SATP Demo program must be opened to copy the signals from the TPS-15 symbol. Note that the signal set is different.

When finished copying the signals to either the **Bedroom** or **Sunroom** touch panel, use the right-click technique described above to copy the signals to the other SATP touch panel.

Adding Kaleidescape modules

Use the following steps to add the sample OSD and SATP modules from the Kaleidescape Demo programs to the SIMPL program.

- 1. From the File menu, open the Kaleidescape SATP Demo program.
- Select the symbol S-1: Kaleidescape SATP v8.4.0 and press Ctrl-C to copy the symbol.


Figure 38: Copying the SATP Demo module



- 3. Return to the program and select the Logic folder.
- 4. Press Ctrl-V twice to paste two copies of the module in the Logic folder. If an error appears stating Could not paste symbol, verify that the Kaleidescape Demo programs were imported correctly. See Importing modules on page 22.


- 5. From the File menu, open the Kaleidescape OSD Demo program.
- Select the symbol S-2: Kaleidescape OSD v8.4.0 in the Logic folder and press Ctrl-C to copy.
- 7. Return to the program and select the Logic folder.
- 8. Press Ctrl-V three times to paste three copies of the module in the Logic folder.

Figure 39: Copying into the Logic folder



9. For clarity, organize the program by moving everything into subsystems based on zones.

Figure 40: Creating subsystems




Programming Kaleidescape modules

Each module must be made unique by modifying the signal names of the sample modules.

Use the following steps to modify signal names.


 Select the Bedroom subsystem (music zone 3) and press F9. The Search and Replace window appears.

Figure 41: Search and Replace window

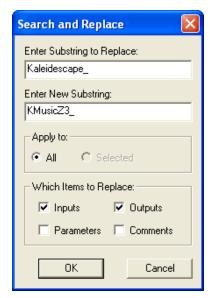

- 2. For all the Inputs and Outputs, replace Kaleidescape_ with KMusicZ3_.
- 3. Click OK.
- 4. Repeat steps with the **Sunroom** subsystem (music zone 4) using the name *KMusicZ4*_ and also with the **Theater** (*KPlayer3*_), **Family Room** (*KPlayer2*_) and **Kitchen** (*KPlayer1*_).
- 5. Open the SATP module for the **Bedroom**, and scroll to the bottom.
- 6. Set the Zone ID to 03d (this is the third music zone of the Music Player).
- 7. Change the **List Window Length** to *06d* (the TPS-4L only supports six lines of text.

Figure 42: Setting Zone ID and List Window Length

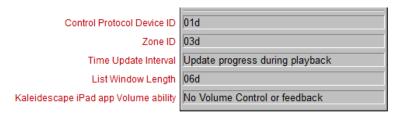


- 8. Repeat these steps for the Sunroom SATP module using Zone ID 04.
- 9. Use these same steps to rename the signals of the touch panel modules.

In this installation example, all Control Protocol Device ID parameters are correctly set to the default CPDID *None(01d)* because the example does not use any command routing.

Indicating System Readiness

A Kaleidescape system will automatically enter idle mode when it is not being used. The digital signals shown in the following figure can be used to track the system readiness state and provide feedback on a touch panel when the Kaleidescape system is not ready or becoming ready.

Figure 43: System Readiness



Because system readiness is a system state, not a player state, all the players in the system will indicate the same state. Even though the OSD, SATP, Music Collections, and Music Presets module each have system readiness outputs, only the signals from one module per system need to be defined.

The [[{{RX\$}}]] and [[{{Connect-F}}]] inputs on the music collection module are optional and do not need to be connected if the system readiness outputs on the music collections module are not going to be used.


For example, if there is an SATP module connected to a player on the same system as a music collection module, the System_Becoming_Ready and System_Not_Ready outputs from the SATP module can be connected to a touch panel to display text. The [[{{RX\$}}]] and [[{{Connect-F}}]] inputs and the system readiness outputs on the Music Collections module do not need to be connected.

Screen masking and anamorphic lenses

Use the following steps to include a screen masking system in the Theater room.

- 1. Open the OSD module for the Theater and scroll to the bottom.
- 2. Set Using a Controlled Mask, to Yes [1d].


Figure 44: Using a Controlled Mask option

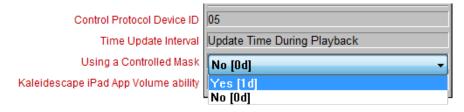

The player is now using the screen mask which places pop-up messages (such as the **Paused** wedge that appears in the upper right corner of the display) in the visible screen area.

3. Find the [Mask ...] output signals in the Masking_Data roll-up. These outputs go high to indicate the type of picture being shown.

Figure 45: Mask output signals

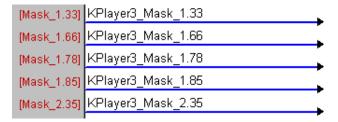

4. Tie these outputs directly to a Serial I/O symbol to use with the masking system.

If the projector in this installation used an anamorphic lens, the projector can be controlled using the anamorphic outputs in the **Video_Mode** roll-up.

Figure 46: Anamorphic outputs

```
[16x9_Frame_with_2.35_Image]
[16x9_Frame_with_Non-2.35_Image]
```

CinemaScape mask


If CinemaScape mode has been enabled, use the CinemaScape Mask output to control screen masking. Sample logic has been included in the Kaleidescape OSD Demo program.

Lighting and shades

In rooms that are primarily for movie watching, for example, the Theater and Family Room, lights can dim or turn off when the movie starts, brighten or turn on during intermission, and turn on again at the end credits.

The OSD module provides outputs in the Lighting_Cues roll-up to set this feature.

Figure 47: Lighting Cues

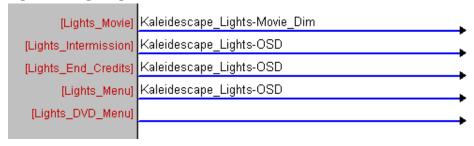

The signals go high for half a second for each of these events. The signals are also buffered to allow for jamming events together (as shown). For IR controlled lighting systems, no additional logic is required. Simply tie these signals to the appropriate

IR commands. For more complex lighting systems, tie these signals to the logic or module being used to control the lights.

Secondary SATP control

In the sample installation, the owner decides to add a second SATP touch panel in the Bedroom, for example, a TPMC-8X. The SATP template for the TPMC-8X uses 16 lines of text for display, instead of the 6 lines on the TPS-4L. The best approach in this situation is to include an SATP module per touch panel size controlling each stream, each with a separate TCP/IP client.

To support our two-panel sample scenario, add another TCP/IP client pointing to the IP address of the Music Player and duplicate the entire control chain for the Bedroom. Copy the SATP module for the Bedroom and change all the signals to a unique name, for example, *KMusicZ3.1_*. Change the [List Window Length] parameter on the new module to 16. Now the touch panels can browse independently of each other. One touch panel can be looking through the Now Playing information while the other is adding new content to play from the genre list.

This method of control does not work properly with command routing because the modules are not able to isolate individual feedback. A dedicated direct TCP/IP connection must be used for each SATP module.

In larger, more complex installations, this method becomes problematic. If there are a large number of touch panels that need to control a large number of zones, creating a module for each zone-to-touch-panel combination is unworkable. To support more complex scenarios, the SATP module has an analog input for [List Window Length] in the List_Control roll-up as shown in the following figure.

Figure 48: SATP analog input for List Window Length




This input allows changing the list length at run time as needed. When the length changes the module refreshes the list with the new length.

For installations like this, remember to add a **Make String Permanent** symbol to keep the nonrouted serial strings in memory.


Volume control

Use the following steps to enable volume control and feedback when using the Kaleidescape App for iPad configured without a controller zone name.

 Select the appropriate combination of control and feedback from the drop down menu.

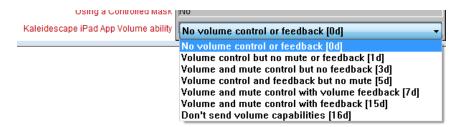

2. Connect the [Volume Up], [Volume Down], [Volume Mute] signals on the output side of the Kaleidescape module to the module of the device controlling volume.

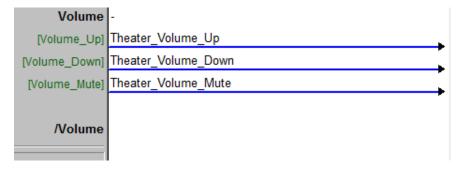

3. Connect the mute feedback and volume level from the module of the device controlling volume to [Mute_On_fb] and [Vol_Level] inputs on the Kaleidescape module. The Kaleidescape App for iPad displays the volume as a percent. The volume level from the device should be scaled to values from 0 to 100.



Troubleshooting

User program commands

The following commands can help debug problems in an installation. These commands must be typed in the Crestron ViewPort or Toolbox Console using the USERPROGCMD command or the short version, UCMD.

These commands have the following syntax.

```
USERPROGCMD "<COMMAND>"
UCMD "<COMMAND>"
```

Where <COMMAND> is one of the following commands. For example, UCMD "K DEBUG" is the command to enable debugging.

K HELP Shows all the valid K commands. If multiple modules are in the program, this information displays multiple times.

K DEBUG	Enables debugging on all modules at run time. All modules report that debugging is turned on.
K DEBUG <cpdid></cpdid>	Enables debugging on only the modules controlling a player with the matching CPDID. This command is helpful in installations using command routing.
K STOP DEBUG	Stops debugging output on all modules.
K ID	Makes all modules report the CPDID of the component the modules are controlling. If the component CPDID is set to <i>None</i> , the module reports 01.
K VER	Reports the version number of the module. If multiple modules are in the program, this information displays multiple times.

Nothing is working

1. If using TCP/IP, open up ViewPort or the Toolbox Console and type est to check the Ethernet status. Verify that the TCP/IP client is connected.

If the TCP/IP client is not connected,

- Verify that TCP/IP client is attempting to connect to the proper IP address.
- Verify that a 1 has been placed on the Connect input of the TCP/IP client.
- Verify that port 10000 is being used on the TCP/IP client.
- Verify that the Crestron controller can successfully ping the Kaleidescape component by typing ping followed by the component IP address. If this action fails, check the network connections and settings.
- 2. If using RS-232, check the cable connections, pinouts, and communication parameters. See *Appendix B: RS-232 Port Configuration and Cable Pinout* on page 65 for more information.
- 3. Verify that the CPDID setting on the module matches the component CPDID set on the installer pages of the browser interface.
- 4. Verify that the Zone ID matches the audio output for listening (SATP).
- 5. Verify that there are no attempts to control the Kaleidescape 1U, 3U or 5U Server.
- 6. Open up **ViewPort** or the **Toolbox Console**, type *ucmd "k debug"* and try to use the interface. Module errors are shown in the window as errors occur and can provide useful information about what the problem could be.
- 7. Open up **Test Manager** and verify that touch panel signals are reaching the module, and the module TX\$ signal is reaching the communication port. Verify that the communication port RX\$ signal is reaching the module.

Music is not changing (SATP controlled zone)

Verify that control is for the intended music zone (audio output).

Cannot make selections with a touch panel with a video window

The zone touch panel interface is not calibrated correctly. *See Calibrating the touch interface* on page 38.

No video on the touch panel with a video window

- 1. If using S-Video, verify that the Y and C connections are not reversed. (Try reversing the connections, just to be sure.)
- 2. Verify that the TPS/IMPC (the device where the video cables terminate) is receiving power either through Cresnet or the power connector.

Note: A touch panel can be powered by the TPS/IMPC, but a TPS/IMPC cannot be powered by a touch panel.

- 3. Verify that the video input for the touch panel is set correctly. Remove the power to the touch panel, touch and hold the touch screen, and reapply power to the touch panel. The touch panel setup menu should appear, which includes an option for setting up the video input.
- 4. Verify that the touch panel has the requisite video card installed (if applicable). If there is no option to configure the video input in the touch panel setup menu, the panel probably does not support video.
- 5. Verify that the Kaleidescape movie zone is configured to provide the video output that the touch panel requires.
- 6. If more than one video input is available on the touch panel, verify that the input is correct.

Video on the touch panel is black and white

The video input for the touch panel is set incorrectly (using S-Video and the touch panel expects composite, or vice-versa). Remove the power to the touch panel, touch and hold the touch screen, and reapply power to the touch panel. The touch panel setup menu should appear which includes an option for setting up the video input.

Getting additional support

Kaleidescape drivers, modules, and templates described in this document are not supported by Crestron.

For additional help contact Kaleidescape Support.


- See online resources at www.kaleidescape.com/support.
- Contact Kaleidescape Support at support@kaleidescape.com or +1 (650) 625-6160

When contacting Kaleidescape Support, be prepared to provide the serial number of the Kaleidescape server. The serial number label is located on the back of all components, and behind the front panels of Kaleidescape servers.


Appendix A: Screen Shots for UI Layouts

OSD control with a video window — Music



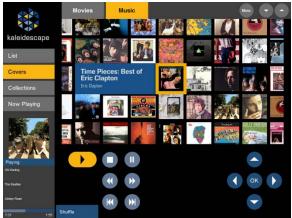





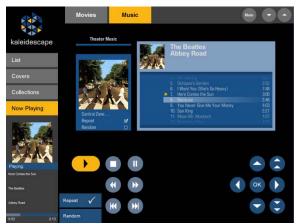




OSD control with a video window — Movies

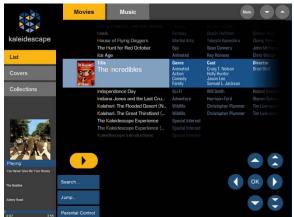




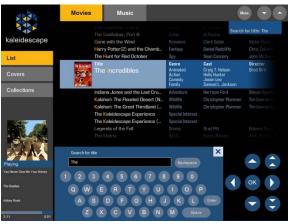

This layout shows the keyboard pop-up after selecting the SEARCH... button.







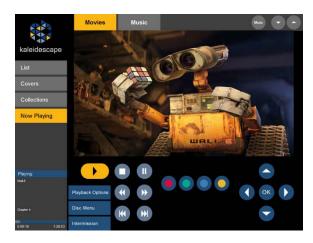





OSD control without a video window — Music

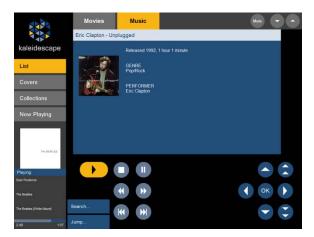

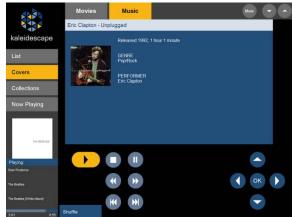


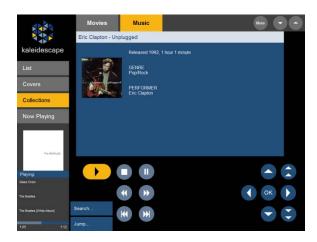

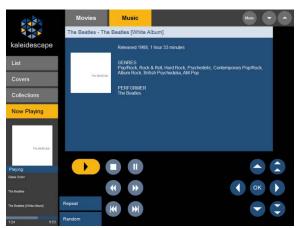





OSD control without a video window — Movies

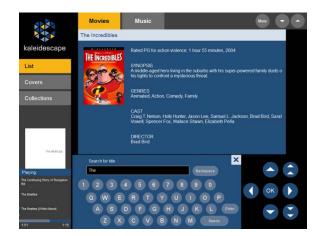


This layout shows the keyboard pop-up after selecting the SEARCH... button.

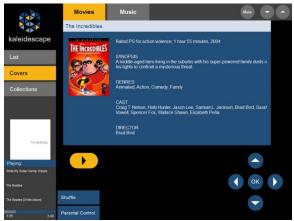


Music can be playing while selecting a movie. The playback status box in the lower left corner feeds back either movie or music information.

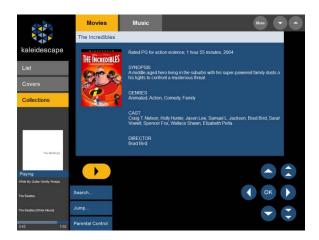


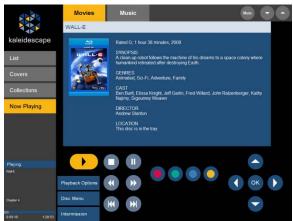






Standalone touch panel

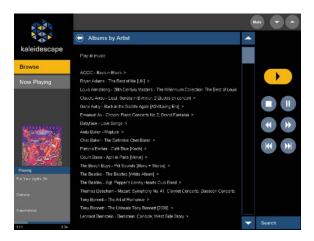

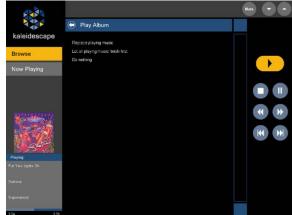

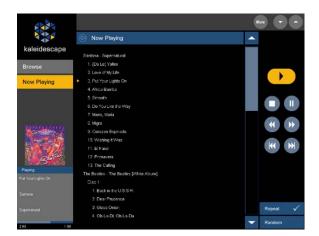

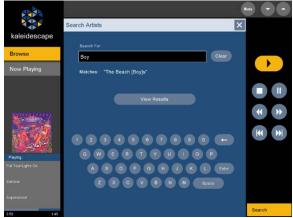



Appendix B: RS-232 Port Configuration and Cable Pinout

Port configuration

M500 Player, Music Player, and Cinema One (1st generation)

If the RS-232 port is used to communicate with a Kaleidescape player or Cinema One, use the following default communication parameters:

Baud rate	1920
Data bits	8
Stop bits	1
Parity	N
Flow control	N

RS-232 communication parameters can be changed on the installer pages of the browser interface.


1U, 3U, and 5U Servers

If the RS-232 port is used to communicate with a Kaleidescape server, server default communication parameters cannot be changed.

Baud rate	115200
Data bits	8
Stop bits	1
Parity	N
Flow control	N

RS-232 port pinouts

The pinouts for the RS-232 port are illustrated below.

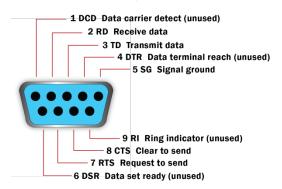

Most Crestron controllers require a crossover (null-modem) cable.

Note: The older KPLAYER-2000 also has a female DB-9 service port that cannot be used for Crestron control.

Appendix C: OSD Module v8.4.0 Parameters and I/O

Parameters

Control Protocol Device ID (CPDID)

This must match the CPDID of the component as set through the Kaleidescape browser interface (http://my-kaleidescape/). None is the default.

When using *None*, the Crestron processor must be directly connected to the designated component.

Time Update Interval

This indicates whether the component should update the time remaining. If the title or chapter location, remaining, or level signals are used, this parameter must be set to 1. If this information is not used, set this parameter to 0 to conserve Crestron processing.

Using a Controlled Mask

If using an automated screen masking system, set this to 1 (yes) to ensure that system messages are not shown in the masked area. If using a fixed mask or no masking, set this to 0 (no) to allow those messages to appear at the top or bottom of the visible area.

Kaleidescape App for iPad Volume Ability

This indicates which volume buttons and feedback will be displayed on the Kaleidescape App for iPad when configured without a controller zone name.

Inputs

{{Rx\$}}	Used for connection to the RX\$ of the connected RS-232 port or TCP/IP client.
{{Connect-F}}	Resends the startup messages to get the module feedback in sync with the component. If using TCP/IP, tie this to the Connect-F output of the TCP/IP client in order to re-sync the feedback if the connection cycles. If using RS-232, simply put a 1 on this input.

Transports

```
[Play], [Pause], [Pause_On], [Pause_Off]

Performs the associated transport action.

[Stop]

Performs the associated transport action. On some screens this also acts as [Cancel].
```

[Fast_Forward], [Rewind] Performs the associated transport action. Each

press steps through different speeds. ${\tt [Play]}$

resumes the content at normal speed.

[Instant_Replay] Skips backward five seconds on each rising edge.

[Skip_Forward], [Skip_Reverse]

Moves to the next or previous chapter. On some

screens this also acts as [Page_Up] or

[Page_Down].

[Intermission_Toggle] Activates the intermission if not currently active.

If intermission is already active, deactivates.

Activating intermission pauses the content, displays the cover art and cues the lighting system (if configured). When in intermission, [Play] resumes the content and [Stop] halts

playback and returns the user to the Kaleidescape onscreen display.

[Intermission_On] Like [Intermission_Toggle], but only

activates intermission. Does nothing if

intermission is already active.

[Intermission_Off] Like [Intermission_Toggle], but only

deactivates intermission. Does nothing if

intermission is not active.

[Bluray_Special_Stop] During Blu-ray Disc™ playback, sends the Blu-

ray STOP command to the disc playing. For all other content, the command behaves as the

[Stop] command.



USING THIS COMMAND CAN TRAP THE USER.

Depending on how the disc was authored, this command does not always return the user to a Kaleidescape movie place. Some discs use this command to access special features. If used as the only STOP command, the controller MUST provide another mechanism to return to the Kaleidescape menu or a Kaleidescape movie place.

Navigation

[Up], [Down], [Left], [Right]

OSD navigation controls. Can be held down to speed the user through whatever list or menu

currently being navigated.

[Page_Up], [Page_Down] For OSD screens showing a list, scrolls the list up

or down by several lines at a time. Can be held down to speed the user through whatever list or menu currently being navigated. Not required for

basic navigation.

[Select] Selects the option currently highlighted, finishes

keypad input, clears error and warning messages

and can re-sort the movie list.

[Child Select] Selects the highlighted item in the OSD. Also

puts the player in Child Mode displaying the

child user interface.

[Cancel] Dismisses the Kaleidescape menu, dismisses the

movie details page, halts keypad or keyboard input, and dismisses the movie overlay. For most functions, the [Stop] key performs identically, with the noted exception of dismissing the movie

overlay. Not required for basic navigation.

The next three signals are used for OSD Video. These signals allow a touch overlay to be created where the user can touch any aspect of the Kaleidescape OSD or the disc menu to make a selection. For this feature to function, a transparent slider must be placed over the video window. On the slider's **Design** tab, set the **Dimension** to 2-D, the **Indicator Type** to *None* and ensure that **Signed Feedback** is *Off*. The **Slider's Analog Join** must be set as well as the **Digital Press Join**. The first **Analog** value is the **X** value and the second is the **Y** value.

When used for the first time, the OSD prompts to calibrate the video touch interface.

[Touch Channel] Tie this signal to the Digital Press Join of the slider.

Indicates that the video window has been

touched.

[Touch X] Tie this signal to the X value of the slider.

Indicates the X coordinate of the video window

that was selected.

[Touch Y] Tie this signal to the Y value of the slider.

Indicates the Y coordinate of the video window

that was selected.

OSD menu control

COD mona control	
[Kaleidescape_Menu_Toggle]	Toggles the display of the Kaleidescape menu. The Kaleidescape menu can be used as a guide to take the user to any location in the Kaleidescape OSD. This menu pops up over whatever activity the user is currently engaged in. The [Menu_x] commands below are shortcuts to different selections within the Kaleidescape menu.
[Kaleidescape_Menu_On]	Like [Kaleidescape_Menu_Toggle], but only causes the Kaleidescape menu to pop up. If the Kaleidescape menu is already onscreen, this command has no effect.
[Kaleidescape_Menu_Off]	Like [Kaleidescape_Menu_Toggle], but only causes the Kaleidescape menu to close. If the menu is not onscreen, this command has no effect.
[Menu_Movie_Place]	Causes the OSD to return to the last movie view (List, Covers, or Collections).
[Menu_Music_Place]	Causes the OSD to return to the last music view (List, Covers, Collections, or Now Playing).
[Menu_Movie_List]	Causes the OSD to change to the Movie List view.
[Menu_Movie_Collections]	Causes the OSD to change to the ${\color{red}\textbf{Movie}}$ ${\color{red}\textbf{Collections}}$ view.
[Menu_Movie_Covers]	Causes the OSD to change to the Movie Covers view.
[Menu_Parental_Control]	Causes the OSD to change to the Parental Control view.
[Menu_Music_List]	Causes the OSD to change to the Music List view.
[Menu_Music_Covers]	Causes the OSD to change to the Music Covers view.
[Menu_Music_Collections]	Causes the OSD to change to the ${\bf Music\ Collections}$ view.
[Menu_Music_Now_Playing]	Causes the OSD to change to the Music Now Playing view.
[Menu_System_Status]	Causes the OSD to change to the System Status view. This last menu selection is not often used,

but the command is available for completeness.

[Screen_Saver] Activates the screen saver, if not already active.

[Screen_Saver_Stop] Stops the screen saver. Performs no operation if

the screen saver is not active.

[Child_Safe_Level] Instantly sets the parental control level to the

next level below the lowest level with a

password.

[Default_Parental_Control_Level]

Changes the parental control level to the default

level set on the browser interface.

[Shuffle_Cover_Art] Shuffles the covers shown on the screen. Also

places the OSD into the shuffle mode if the alphabetize mode has previously been selected. This command only functions when in the Movie or Music Covers view. Shuffle mode is on by default, but can be disabled in the browser

interface.

[Child_Shuffle_Cover_Art] Shuffles cover art on the child user interface.

[Alphabetize_Cover_Art] Rearranges the cover art onscreen into

alphabetical order, disabling automatic shuffling. This command only functions when in the **Movie** or **Music Covers** view. This mode is off by default, but can be enabled in the browser interface.

[Details_Popup_Toggle] Opens the details page on the OSD. This displays

details about the content currently playing or

currently selected.

[Filter_List] Filters the Movie or Music List view. Text entered is

used to narrow down the list of movies or

albums.

[Filter_Keyboard_Clock] Issues a Filter_List command if the keyboard

is not active, and issues a Cancel if the keyboard is active. This has the effect of toggling the keyboard on and off while in the Movies or Music

List view.

[Quick_Search_Keyboard_Clock]

Pulse this input to toggle the

[Quick_Search_Keyboard_Active] feedback. This input is used to show and hide the quick search keyboard. The quick search keyboard should only have keys a through z on it.

Movie playback

[Disc_Menu] For most DVD or Blu-ray discs, this command

calls up the disc menu. The operation of this key can vary from disc to disc. This command can also cue the lighting system, if so configured.

[Disc_Top_Menu] For most DVD or Blu-ray discs, returns to the

main disc menu. The operation of this key can

vary from disc to disc.

[DVD_Resume] For most DVDs, dismisses the DVD menu and

returns to the previously viewed content. The operation of this key can vary from disc to disc. This command has no effect on Blu-ray discs.

[Disc_or_Kaleidescape_Menu]

Functions as [Disc_Menu] during content

playback and as

[Kaleidescape_Menu_Toggle] when not in content playback. This command can be used

when control buttons are limited.

[Force_Disc_Menu_mode] Temporarily forces the output of

[Disc_Menu_fb] to go high. Useful as an override when the menu detection is incorrect.

[Force_clear_Disc_Menu_mode]

Temporarily forces the output of [Disc_Menu_fb] to go low.

[Force_Disc_Menu_mode_toggle]

Temporarily toggles the state of

[Disc_Menu_fb].

[Favorite_Scene_Set_Start] Sets the beginning of the favorite scene. If not

set, this defaults to the beginning of the content.

[Favorite_Scene_Set_End] Sets the end of the favorite scene. If not set, this

defaults to the end of the content.

[Favorite_Scene_clock] Toggles the state of [Favorite_Scene_fb],

which can be used to control when the touch panel shows the favorite scene start and end

buttons.

[Status_and_Settings_Toggle]

Toggles the display of the movie overlay.

[Show_Navigation_Overlay] Takes the user directly to the navigation option

of the movie overlay.

[Start_Chapter_Entry] Used to enter a chapter number during content

playback. Use the [Select] command as an

enter key.

[Start_Chapter_Entry_Clock]

This activates the [Start_Chapter_Entry] or [Cancel] command in the OSD depending on

the state of [Keypad_Active]. This command toggles the chapter entry on and off during

playback.

[Audio_Next] During movie playback, changes to the next

audio stream. At other times this command has

no effect.

[Subtitles_Next] During movie playback, changes to the next

subtitle stream. At other times this command has

no effect.

[Angle_Next] During movie playback, selects the next available

angle. At other times this command has no

effect.

[Angle_Prev] During movie playback, selects the previous

available angle. At other times this command has

no effect.

[Red_Button], [Green_Button], [Blue_Button], [Yellow_Button]

During Blu-ray disc playback, performs the disc actions associated with that color button. These actions are defined by the disc itself and can vary from disc to disc. Kaleidescape recommends that these buttons are displayed to the user in a row, in the order of Red – Green – Blue – Yellow.

Note: These buttons can be used only when the movie is started with Play Disc. If the movie was started from the bookmark (using Play Movie), the movie must be restarted with Play Disc to use these special features.

Music playback

[Random_Toggle] Toggles random music playback. Note that this

command does not always function because some music always plays back in random order. See *Music items in the Kaleidescape System* on

page 14 for details.

[Repeat_Toggle] Toggles repeat music playback. Note that this

command does not always function because some music always repeats. See *Music items in the Kaleidescape System* on page 14 for details.

Volume control

[Mute_On_fb], [Vol_Level]

The module passes this feedback to the Kaleidescape App for iPad when not configured with a controller zone name so that the user can see the current volume level and mute state.

Keyboard/Keypad

Keyboard input is used for filtering movie or music lists, jumping to a specific place in the list, for naming favorite scenes and for naming mix albums. If any non-numeric (a-z) key is sent to the OSD when in the Movie or Music List view, the OSD jumps to the item that begins with that letter in the currently sorted column. Numeric keys start the passcode entry dialog.

To filter the movie or music list, the [Filter_List] command must be sent first. Once given, all keyboard keys (a-z, 0-9) are can be used for the filter. If using the [Filter_Keyboard_Clock] input and [Keyboard_Active] output, the [Filter_List] command is automatically issued at the appropriate time.

[Backspace] The Backspace key for a keyboard or keypad.

[Enter] The Enter or Select key for a keyboard or keypad.

[Keypad_0] ... [Keypad_9] Sends this digit to the OSD. Keypad input (0-9) is

solicited from various functions such as

[Start_Chapter_Entry], passcode entry and UPC entry. Entering unsolicited keypad input is interpreted as passcode entry. Various entry modes require the [Select] input to be used as

an Enter key.

[Keyboard_A] ... [Keyboard_Z]

Sends this character to the OSD.

[Keyboard_space], [Keyboard_period],
[Keyboard_comma], [Keyboard_apostrophe],

[Keyboard_hyphen]

Sends this character to the OSD.

[Other_Key_Inputs\$] If other keyboard characters are required, create

a Serial I/O (SIO) symbol and populate the SIO with the desired keys. Each key should only send a single character at a time. Do not use the Crestron keyboard symbol with this input.

Screen masking

[Calibrate_Masking] Causes the OSD to change to the Calibrate Masking

screen. This screen is used to calibrate

[Mask_Calibrated_Top] and
[Mask_Calibrated_Bottom] values.

[Calibrate_Masking_Overscan]

Causes the OSD to change to the Calibrate Masking
Overscan screen. This screen is used to indicate
the position of the overscan onto the

Kaleidescape movie zone. This overscan data is

used in calculating the

[Mask_Calibrated_Top] and

[Mask_Calibrated_Bottom] values.

Script control

[Play_Script\$] Use a Serial I/O (SIO) symbol to send the name

of the script to play to this input. Every time this text changes, the module sends the command to play the script. The same script can be triggered more than once. The name is case sensitive. If the script name does not exist, a message

appears on the OSD.

[Demo] Plays the script named *Demo button*, if **Demo**

button exists. Otherwise, plays all favorite scenes

in order.

[Demo_Loop] Plays the script named Demo button loop, if Demo

button loop exists. Otherwise, plays all favorite

scenes in an infinite loop.

Power

[Power_on] Turns the component on. See *Power control* on

page 38 for additional notes on this input. While held high, the module attempts to keep the

component turned on.

[Power_off] Turns the component off. When A/C power is

interrupted, a component always returns to the last power state. See *Power control* on page 38

for more information.

[Command_To_Player\$] This input can be used to send any arbitrary

command to the component. The module automatically adds the correct CPDID, sequence number, and terminating colon and line feed to any string sent to this input. For example,

attaching a Serial I/O (SIO) symbol to this signal and sending PLAY would send 03/1/PLAY:\n to

the component with CPDID *03*. This input provides direct access to the control protocol.

Music zone control

[Zone_to_Control\$] Sets the local movie zone to control a (possibly

remote) music zone. Input can define the device to control either by serial number or by CPDID. A 01.01 always returns to local control. See *Music zone control* on page 33 for more information.

Outputs

 $\{ \{ Tx \$ \} \}$ Used for connection to the TX\$ signal of the

connected RS-232 or TCP/IP client.

[Player_Name\$] This output provides the name of the connected

movie zone as defined in the installer pages of

the browser interface.

Transports

[Play_fb], [Stop_fb], [Pause_fb], [Fast_Forward_fb], [Rewind_fb]

Indicates feedback state for these functions.

[Intermission_fb] This signal is active when in the intermission

state.

Navigation

[Arrow_Keys_Active] Indicates that the OSD is in a state where the

arrow keys are required.

[Page_Keys_Active] Indicates that the OSD is in a state where the

page keys can be used.

OSD menu control

[UI_Page_OSD_Menu] Indicates that the player is currently showing the

Kaleidescape OSD (as opposed to when a movie

is playing).

[Kaleidescape_Menu_fb] This output is high as long as the Kaleidescape

menu is showing on the OSD.

[Menu_Movie_Place_fb] Indicates that the OSD is in a movie place. This is

high when [Menu_Movie_List_fb],
[Menu_Movie_Collections_fb],

[Menu_Movie_Covers_fb],

[Menu_Parental_Control_fb], or [Menu_Movie_Playing_fb] are high. [Menu_Music_Place_fb] Indicates that the OSD is in a music place. This is high when [Menu_Music_List_fb],

[Menu_Music_Covers_fb],

[Menu_Music_Collections_fb], or [Menu_Music_Now_Playing_fb] are high.

[Movie_Capable] Indicates that the Kaleidescape System is

capable of movie playback. As of control protocol version 6.2, this capability is always assumed to

be true.

[Menu_Movie_List_fb] Indicates that the OSD is currently in the Movie

List view.

[Menu_Movie_Collections_fb]

Indicates that the OSD is currently in the Movie

Collections view.

[Menu_Movie_Covers_fb] Indicates that the OSD is currently in the Movie

Covers view.

[Menu_Parental_Control_fb] Indicates that the OSD is currently in the Parental

Control view.

[Menu_Movie_Playing_fb] Indicates that movie content is currently playing

back.

[Music_Capable] Indicates that the Kaleidescape System is

capable of music playback. This is assumed to be true when the Kaleidescape System reports a

control protocol version of 5 or higher.

[Menu_Music_List_fb] Indicates that the OSD is currently in the Music

List view.

[Menu_Music_Covers_fb] Indicates that the OSD is currently in the Music

Covers view.

[Menu_Music_Collections_fb]

Indicates that the OSD is currently in the Music

Collections view.

[Menu_Music_Now_Playing_fb]

Indicates that the OSD is currently in the Music

Now Playing view.

[Menu_System_Status_fb] Indicates that the OSD is currently displaying the

System Status page.

[Screen_Saver_fb] Indicates that the screen saver is currently being

displayed. The screen saver can be configured on the browser interface to start automatically after

a selected period of inactivity. This setting

defaults to five minutes.

[Screen_Saver_fb*] The inverse of [Screen_Saver_fb].

[Details_Popup_fb] Indicates that the Details screen is visible on the

OSD.

[Quick_Search_Keyboard_Active]

Feedback for showing the quick search keyboard.

If any key is pressed on the keyboard, this

feedback signal goes low.

[Passcode_Entry_fb] Indicates that the Parental Control Passcode dialog

box is being displayed onscreen. Used for

parental control.

[Simple_Question_fb] Indicates a dialog box containing a simple

question is onscreen.

[Information_Message_fb] Indicates that a dialog box with an information

message is onscreen.

[Warning_Message_fb] Indicates that a dialog box with a warning

message is onscreen.

[Error_Message_fb] Indicates that a dialog box with an error message

is onscreen.

[Play_Button_Available] Indicates that the PLAY button should be

displayed to the user.

Movie playback

[UI_Page_Movie_Playback] Indicates that the player is currently in movie

playback mode.

[Playing DVD] Indicates that the player is currently playing a

DVD.

[Playing_Video_Stream] Indicates that the player is currently playing a

video stream. A video stream is movie content that does not come from a DVD or Blu-ray disc.

[Playing_BluRay] Indicates that the player is currently playing a

Blu-ray disc.

[Disc_Menu_fb] Indicates that the disc menu is being displayed.

Because of the various methods of disc

authoring, this is an inexact indicator, which can

be incorrect.

[Disc_Menu_fb*] The inverse of [Disc_Menu_fb].

[Main Content fb] Indicates that the main video content is playing.

This is low during trailers, special features, and

the disc menu.

[Ending_Credits_fb] Indicates that the end credits are being shown.

[Favorite_Scene_fb] Indicates that the touch panel should display the

favorite scene start and end buttons.

[Status_and_Settings_fb] Indicates that the movie overlay is active.

[Popup_Status_fb] Indicates that the movie overlay is active and

displaying the status option.

[Popup_Navigation_Overlay_fb]

Indicates that the movie overlay is active and

displaying the navigation option.

[Angle_Available] This feedback goes high if an alternate angle is

available in the current position of the playback.

[Number_Camera_Angles] This feedback indicates the number of angles

available in the current position of the playback.

[Current_Camera_Angle] This feedback indicates the currently selected

angle.

Music playback

[Music_Playback_Active] This signal is active during music playback.

[Random_Status] Indicates that music is currently in random

playback mode. Note that this condition

sometimes remains as some music always plays back in random order. See *Music items in the Kaleidescape System* on page 14 for details.

[Repeat_Status] Indicates that music is currently in repeat

playback mode. Note that this condition sometimes remains as some music always repeats. See *Music items in the Kaleidescape*

System on page 14 for details.

Playback information

[Now_Playing_Title_Name\$] Name of the content currently playing.

[Now_Playing_Artist_Name\$] Name of the artist for the content currently

playing.

[Now_Playing_Album_Name_or_Chapter\$]

Name of the chapter or album for the content

currently playing.

[Now_Playing_Cover_URL\$] A touch panel that supports dynamic graphics

can use this signal to display cover art for the

content currently playing.

The following nine signals [Title_x] and [Chapter_x] can be used to display information about the content currently playing. If the Time Update Interval parameter is set to 1, the signals update once per second, otherwise the signals only update when the chapter or title changes.

Note that on a DVD, each title usually contains full content, i.e., the movie will be on its own title, as will an episode. Title information can be used to show overall progress through a piece of content.

[Title_Length] Length of the current title in seconds. This is

usually the length of the movie.

[Title_Location] Current position of the playback within the title,

expressed in seconds.

[Title_Remaining] Number of seconds remaining in the current title.

[Title_Level] A percentage of the elapsed time in the title

(actually expressed as 0-65535). This percentage can be used to place a progress bar (slider) on a touch panel to show the current relative position

in playback.

[Chapter_Number] Analog feedback indicating the current chapter.

[Chapter_Length] Length of the current chapter in seconds. Usually

a movie is made up of several chapters.

[Chapter_Location] Current position of the playback within the

chapter, expressed in seconds.

[Chapter_Remaining] Number of seconds remaining in the current

chapter.

[Chapter_Level] A percentage of elapsed time in the current

chapter (actually expressed as 0-65535). This percentage can be used to place a progress bar (gauge) on a touch panel to show the current

relative position within the chapter.

Volume control

[Volume_Up], [Volume_Down], [Volume Mute]

These outputs pulse to indicate the player received Kaleidescape IR volume commands or volume commands from the Kaleidescape App

for iPad without a controller zone name.

Details page

[Details_Visible] Used to drive the details page on the touch

panel. This is high when the details can be displayed and low when details have been made obsolete by an onscreen change. Details should

not be displayed when this is low.

[Details_Text\$] A complete description of the item currently

highlighted in the OSD, formatted to be similar to the text of the details page of the item on the

OSD.

[Details_Title\$] The title of the content that is currently

highlighted in the OSD.

[Details_Cover_URL\$] The URL of cover art image for the highlighted

item (movie or music). A touch panel that supports dynamic graphics can display the

image at this URL.

[Movie_Details_Visible] Same as [Details_Visible], except that this

signal and the next one specify the aspect ratio of the cover art for the touch panel. A high signal indicates that the details should be displayed, and that the cover art being reported through [Details_Cover_URL\$] is a movie, and that the touch panel should use the 10:7 aspect ratio for

cover art.

[Music_Details_Visible] Same as [Details_Visible], except that this

signal and the previous one specify the aspect ratio of the cover art for the touch panel. A high signal indicates that the details should be

displayed, and that the cover art being reported through [Details_Cover_URL\$] is a CD, and that the touch panel should use the 1:1 aspect

ratio (square) for cover art.

Keyboard/Keypad

[Keyboard_Active] Feedback indicating that keyboard input is

expected. This should be used to show an A-Z, 0-

9 keyboard on a touch panel.

[Keypad_Active] This feedback indicates that keypad input is

being solicited. This should be used to show a

0-9 keypad on the touch panel.

[User_Input_Prompt\$] Used for the keyboard and keypad input.

Indicates what input is being prompted for on

the OSD.

[User_Input_Text\$] Used for keyboard and keypad input. Indicates

what input has already been entered on the OSD.

CinemaScape

[1.78_(CinemaScape_Off)_fb], [CinemaScape_2.35_Anamorphic_fb], [CinemaScape_2.35_Letterbox_fb], [CinemaScape_Native_2.35_fb]

Indicates which CinemaScape Mode the player is

currently in.

[No_Scaling], [CinemaScape_Scale_Mode_Anamorphic],
[CinemaScape_Scale_Mode_Zoom]

Indicates whether an anamorphic lens, or a native 2.35 projector's zoom mode should be

enabled.

[CinemaScape_Mask] Used to return the frame ratio parameter for

[CinemaScape Mode]. A zero-padded three-digit number between 000 and 999, in hundreths of the ratio of the frame width to the frame height. The command will receive a valid response regardless of whether or not the player

is in a CinemaScape mode.

Screen masking

[Mask_Absolute_Top], [Mask_Absolute_Bottom]

Describe the position for the top and bottom masks in absolute terms, measured from the top and bottom of the video signal, respectively. These values are expressed as Crestron percentage values. A [Mask_Absolute_Top] value of 20%, for example, means that the top mask should cover the top 20% of the video signal. These values do not account for overscan.

[Mask_Calibrated_Top], [Mask_Calibrated_Bottom]

Once the masking system is calibrated through the OSD, these signals display the same information as [Mask_Absolute_Top] and [Mask_Absolute_Bottom], but in the values obtained mathematically from the calibration. The calibration will account for overscan.

[Mask_1.33], [Mask_1.66], [Mask_1.78], [Mask_1.85], [Mask_2.35]
Indicate the actual aspect ratio of the video
content (as opposed to the full-frame content
stored on the DVD or Blu-ray disc). These signals
can be used to recall presets on a masking
system or scaler.

[Conservative_1.33], [Conservative_1.66], [Conservative_1.78], [Conservative_1.85], Conservative_2.35]

The [Conservative_x] signals are similar to the [Mask_x] signals, but represent a more conservative estimate of the image aspect ratio. This value will never go too far into the actual picture. For instance, if a 2.35 movie were a bit taller than 2.35 and a true 2.35 mask would crop the image a bit, the conservative information would suggest the next most open value: 1.85 - [Mask_2.35] and [Conservative_1.85] would both be active. Do not use these signals in conjunction with the [Mask_x] signals — use one set or the other.

Lighting cues

[Lights_Movie] Pulses for 0.5 seconds when entering movie playback. This uses the [Main_Content_fb] signal and has the same restrictions. This is buffered so that it can be jammed with a touch panel button.

[Lights_Intermission] Pulses for 0.5 seconds when entering Intermission. This is buffered so it can be jammed with a touch panel button.

[Lights_End_Credits] Pulses for 0.5 seconds when end credits are shown. This is buffered so that it can be jammed with a touch panel button.

[Lights_Menu] Pulses for 0.5 seconds when returning to the Kaleidescape OSD from playback. This is buffered so that it can be jammed with a touch panel button.

[Lights_Disc_Menu] Pulses for 0.5 seconds when entering the disc menu as indicated by the [Disc_Menu_fb]

signal. This is buffered so that it can be jammed

with a touch panel button.

Video mode

[Frame_4x3], [Frame_16x9]

Indicate the full-frame aspect ratio of the video content output by the movie zone. This allows for adjustments for any external scaling that gets applied to the video frame. If the video output is configured to correct for 16:9, then

[Frame_16x9] will remain high and black bars

[Frame_16x9] will remain high and black bars will be put in the image to correct any 4:3 content. Similarly, when correcting for 4:3; black bars will be put in the image to correct any non-4:3 content.

[16x9_Frame_with_2.35_Image]

Indicates that the movie playing has a 16:9 frame and has an aspect ratio of 2.35:1. Use to control the positioning of the anamorphic lens used with 2.35 screens.

[16x9_Frame_with_Non-2.35_Image]

Indicates that the movie playing has a 16:9 frame and has an aspect ratio that is not 2.35:1. Use to control the positioning of the anamorphic lens used with 2.35 screens.

[Composite_x], [Component_x], [HDMI_x]

Used to describe the precise video mode and aspect ratio of each output. These signals provide similar information to that presented in the [Frame_x] feedback above. The specific meanings of the different suffixes are provided below.

[x_No_Output]

When this feedback is high, the video output x is turned off. This happens on a secondary output when the primary output is showing a mode that this output is not configured for. For example, if HDMI is configured as the primary video output, and the HDMI can display 576i but the composite video is configured without 576i, then when a 576i signal is shown, the composite output is disabled.

[x_480i] NTSC interlaced

[x_576i] PAL interlaced

[x_480p] NTSC progressive

[x_576p] PAL progressive

[x_720p60] **720p HD (North America)**

[x_720p50] **720p HD**

[x_1080i60] 1080i (North America)

[x_1080i50] 1080i HD

[x_1080p60] 1080i (North America)

[x_1080p50] 1080i HD

[x_1080p24] 1080i HD

 $[x_4x3]$ 4:3 output

[x_16x9] **16:9** output

 $[x_64x27]$ 64:27 output

Script control

[Script User Command\$] A script can contain a step that sends a string to

the control system. That string appears in this output and can be matched with a Serial I/O (SIO)

symbol to trigger custom programming.

Power

[Power on fb] Indicates that power to the component is on.

While held high, the module attempts to keep the

component turned on.

[Power_off_fb] Indicates that power to the component is off.

System Readiness State

[System_Ready] Indicates that the Kaleidescape system is ready.

[System_Becoming_Ready] Indicates that the Kaleidescape system is

becoming ready from an idle state.

[System_Not_Ready] Indicates that Kaleidescape system is idle.

Music zone control

[Controlling_SN.Zone\$] Indicates (by serial number) which music zone

the local movie zone is controlling. When the local music zone is controlled, this will match the serial number (plus .01) of the local device. See

Music zone control on page 33 for more

information.

[Controlling_CPDID. Zone\$] Indicates (by CPDID) which music zone the local

movie zone is controlling. When the local music zone is controlled, this will match the CPDID

(plus .01) of the local device. See *Music zone* control on page 33 for more information.

Child commands

[Child_Play] If child user interface is already active, performs

the associated transport action. If not, activates child user interface if the child user interface is

not active.

[Child_Stop]
[Child_Pause]

[Child_Up], [Child_Down], [Child_Left], [Child_Right]

If already in child user interface, navigates the covers view. If not, activates the child user

interface.

[Child_Shuffle_Cover_Art] If the child user interface is already active,

shuffles cover art on the child user interface. If

not, activates the child user interface.

[Enter_Child_Mode] Puts the player in Child Mode and displays the

child user interface.

[Leave_Child_Mode] Takes the player out of Child Mode and displays

Covers view.

[Child_Mode_FB] Indicates that the child user interface is active.

Appendix D: SATP Module v8.4.0 Parameters and I/O

Parameters

Control Protocol Device ID (CPDID)

This must match the CPDID of the component as set through the Kaleidescape browser interface (http://my-kaleidescape). *None* is the default.

When using *None*, the Crestron processor must be directly connected to the designated component.

Zone ID

This indicates which zone output to control on the Kaleidescape player.

Time Update Interval

This indicates whether or not the component updates the time remaining. If the song position, remaining or progress level are used this needs to be set to 1. If this information is not used, set this to 0 to conserve Crestron processing.

List Window Length

This indicates the number of indirect text fields on the touch panel available for displaying selections while browsing or searching music. This can also be overridden using the analog input of the same name.

Kaleidescape App for iPad Volume Ability

This indicates the volume buttons and feedback that will be displayed on the Kaleidescape App for iPad.

Inputs

Used for connection to the RX\$ signal of the connected RS-232 port or TCP/IP client.

Resends startup messages to get the module feedback in sync with the component. If using TCP/IP, tie this to the Connect-F output of the TCP/IP client to re-sync the feedback if the connection cycles. If using RS-232, simply put a 1 on this input.

Transports

[Play], [Stop], [Pause],
[Pause_On], [Pause_Off],
[Fast_Forward], [Rewind],
[Skip_Forward], [Skip_Reverse]

Performs the associated transport action.

[Play_or_Pause] Performs a play action or pause action

depending on the current playback state. If music is playing, this input pauses music playback. If music is stopped or paused, this input resumes playback.

Playback control

[Random] Toggles random music playback. Note that this

feature does not always function because some music always plays back in random order. See *Music items in the Kaleidescape System* on page

14 for details.

[Repeat] Toggles repeat music playback. Note that this

feature does not always function because some music always repeats. See *Music items in the Kaleidescape System* on page 14 for details.

Volume control

[Mute On fb], [Vol Level] The module passes this feedback to the

Kaleidescape App for iPad when not configured with a controller zone name so that the user can see the current volume level and mute state.

List control

[Browse_Select] Causes the Browse view to be shown in the List

window. If the **Browse** view is already shown in the **List** window, this input takes the user to the

top of the tree (home).

[Now_Playing_Select] Causes the Now Playing information to be shown

in the List window.

[List_Begin] Causes the List window to go to the top of the list

that is showing. If showing the **Browse** view, this input takes the user to the top of the tree (home). If showing the **Now Playing** view, this input takes the user to the beginning of the list or, if music is

playing, to the item currently playing.

[List_Back] Causes the List window to show the previous list.

The back information between the Now Playing

view and **Browse** view are independent.

[Keyboard_Search] Activates the keyboard pop-up to allow a search

string to be entered.

[List_Scroll_Bar_Act] An analog input to allow the list to scroll.

[List_Up] Moves the List window up one page.

[List_Down] Moves the List window down one page.

[List_Highlight_Act] An analog input to allow the highlight to scroll

through the list.

[List Window Length] Allows the number of indirect text fields used to

display results to be modified at run time.

[List_Highlight_Up] Moves highlight up one item.

[List_Highlight_Down] Moves highlight down one item.

[List_Highlight_Select] Selects currently highlighted item.

List window

[List_Select1], [List_Select20]

Selects one of the specific lines of the list

window.

Keyboard

[View_Search_Result] Displays the results of the search to be browsed

by the user.

[Keyboard_Enter] If multiple matching items are found, the results

are displayed to be browsed by the user. If a single matching item is found, the item is

selected for playback.

[Keyboard Backspace] Removes the last character entered from the

queue built using Keyboard_Input.

[Keyboard_Clear] Removes all characters entered from the queue

built using Keyboard_Input.

[Keyboard_Cancel] Aborts the current search.

[Keyboard_Space] [Keyboard_A] through [Keyboard_Z]

[Keyboard_0] through [Keyboard_9]

Sends this character to perform search functions. For a standard QWERTY keyboard, each button on the keyboard triggers a single character. [Alphapad x] For a smaller, predictive text (cell phone style)

keyboard, each button can represent multiple characters. For example, the 2 button can trigger [2ABC], which would then match any item with

either a 2, A, B or C in that position.

[Other_Key_Inputs\$] If other keyboard characters are required, create

a Serial I/O (SIO) symbol and populate the symbol with the required keys. Each key should only send a single character at a time to this

input.

Power

[Power_On] and [Power_Off] Places the component in or out of standby mode.

These inputs affect all four music zones of a Music Player. If [Power_On] is held high, the module attempts to keep the component

powered on.

[Command_To_Player\$] This input can be used to send any arbitrary

command to the component. The module automatically adds the correct CPDID, Zone ID, sequence number, and terminating colon and

line feed to any string sent to this input.

For example, PLAY would become

 $01.01/1/PLAY:\n$

for a module controlling CPDID 01 Zone ID 01. This input provides direct access to the control

protocol.

Outputs

 $\{Tx$\}$ Used for connection to the TX\$ signal of the

connected RS-232 or TCP/IP client.

[Zone_Name\$] This output provides the name of the connected

music zone as defined in the installer pages of

the browser interface.

Transports

[Play_fb], [Stop_fb], [Pause_fb],
[Fast_Forward_fb], [Rewind_fb]

Transport feedback. Only one of these signals is active at any given time.

Playback control

[Random_Status] Indicates that music is being played back

randomly. Note that this will sometimes remain

on because some music always plays back in

random order. See *Music items in the Kaleidescape System* on page 14 for details.

[Repeat_Status] Indicates that music is playing back repeatedly.

Note that this will sometimes remain on because some music always repeats. See *Music items in the Kaleidescape System* on page 14 for details.

Playback information

[Music Playback Active] This signal is active while music playback is

occurring.

[Song_Length] Length of the song currently playing, expressed

in seconds.

[Song_Remaining] Amount of time remaining in the song currently

playing, expressed in seconds.

[Song_Progress_Level] A percentage of the elapsed time in the song

(actually expressed as 0-65535). This can be used to place a progress bar (gauge) on a touch panel to show the current relative position in the

playback.

[Song_Position] Current position of the current song, expressed

in seconds.

[Now_Playing_Title\$] Name of the song currently playing.

[Now_Playing_Album\$] Name of the album associated with the song

currently playing.

[Now Playing Artist\$] Name of the artist associated with the song

currently playing.

[Now_Playing_Cover_URL\$] Indicates the URL of the cover art for the content

currently playing.

Volume control

[Volume_Up], [Volume_Down], [Volume Mute]

Pulse to indicate the player received

Kaleidescape IR volume commands or volume commands from the Kaleidescape App for iPad

without a controller zone name.

List control

[Browse_Selected] Indicates that the Browse view is shown in the List

window.

[Now_Playing_Selected] Indicates that the Now Playing view is shown in

the **List** window.

[List_Back_Available] Indicates that the user can go back to the

previous list. This can be used to show the BACK

button as enabled or disabled.

[Keyboard_Search_Available]

Active when the touch panel is displaying a list

that can be searched.

[Keyboard_Search_Active] Active when the keyboard is required to accept a

search string from the user.

[List_Scroll_Available] Indicates that there is more information in the

current list than can be shown in the List window.

This can be used to display the scroll bar

dynamically.

[List_Scroll_Bar_FB] Indicates the relative position within the list that

is shown in the List window. This provides the feedback for the [List_Scroll_Bar_Act] input.

[List_Scroll_Bar_Size_FB] Indicates the relative size of the list to the size of

the **List** window and can be used with scroll bar modes to show a scroll bar handle that changes size depending on the amount of information not

shown in the list.

A value of 0 means that the entire list fits in the

List window (and the

[List_Scroll_Available] output is low).

Values between 1 and 9 indicate relative list bar sizes with 1 being the smallest (approximately 10% of the entire size scroll bar size) and 9 being the largest (approximately 90% of the entire size).

[List_Highlight_FB] Indicates the absolute position of the highlighted

line in the list currently displayed. This provides the feedback for the [List_Highlight_Act] input.

List window

[List Title\$] The title shown at the top of the List window.

[List_Text1\$], [List_Text20\$]

Text for each line of the List window.

[List_Selected1], [List_Selected20]

Feedback for the select status of each line of the list. Leave any output blank that the touch panel

is not actually using.

[List_Queue_Status1], [List_Queue_Status20]

Feedback to show the queue status of each line of the list. These values will either be 1 (playing), 2 (paused) or 3 (in the queue). This should be used to show a small icon adjacent to each line in the **List** window.

Keyboard

[Keyboard_Title\$] Text describing the current function of the

keyboard. For example, while searching for an

artist, this will contain Search Artists.

[Keyboard_Text\$] This field contains the text that has been entered

on the search keyboard.

[Search_Mini_Result\$] This field contains an abbreviated version of the

search results. For example, while 43 items match the query, this string would read *43*

Entries. If the search has been narrowed down to a single item, this string will display that item (for

example, "The Beatles").

System Readiness State

[System_Ready] Indicates that the Kaleidescape system is ready.

[System_Becoming_Ready] Indicates that the Kaleidescape system is

becoming ready from an idle state.

[System_Not_Ready] Indicates that Kaleidescape system is idle.

Appendix E: Keypad Presets Module v7.1.0 Parameters and I/O

Parameters

Control Protocol Device ID (CPDID)

This must match the CPDID of the component as set through the Kaleidescape browser interface (http://my-kaleidescape/). *None* is the default.

When using *None*, the Crestron processor must be directly connected to the designated component.

Zone ID

This indicates which zone output to control on the Kaleidescape player.

Preset ID

A text identifier used for the set of presets. The Preset ID can be unique among all preset modules, or multiple instances of the module can use the same Preset ID to manipulate the same set of presets.

Hold Time

This sets the amount of time to hold one of the [Preset#] inputs, must be held in order to save the preset.

Inputs

•	
{{Rx\$}}	Used for connection to the RX\$ of the connected RS-232 port or TCP/IP client.
{{Connect-F}}	Resends the startup messages to get the module feedback in sync with the component. If using TCP/IP, tie this to the Connect-F output of the TCP/IP client in order to re-sync the-feedback if the connection cycles. If using RS-232, simply enter a 1 on this input.
<pre>[Play], [Stop], [Pause], [Fast_Forward], [Rewind], [Skip_Forward], [Skip_Reve</pre>	rse] Performs the associated transport action.
[Play-Pause]	Performs a play action or pause action depending on the current playback state. If music is playing, this input pauses music playback. If music is stopped or paused, this input resumes playback.

[Random] Toggles random music playback. Note that this

does not always function because some music always plays back in random order. See *Music items in the Kaleidescape System* on page 14 for

details.

[Repeat] Toggles repeat music playback. Note that this

does not always function because some music always repeats. See *Music items in the*

Kaleidescape System on page 14 for details.

[Preset_Lock] When this input is high, saving any preset is

disabled.

[Preset_First] Triggers the first defined preset, starting at

preset 1 and moving forward from there. Any preset not stored in the Kaleidescape System is

skipped.

[Preset_Next], [Preset_Previous]

Cycles through module presets, skipping any presets not been stored in the Kaleidescape System. If a preset is currently active, then the cycle starts there. If no presets are active, the cycle starts with the most recently selected

preset.

[Preset1] - [Preset10] Triggers or sets the preset. If the [Lock] input is

low and the input remains high (held) for the amount of time specified by the Hold Time parameter, the preset will be saved. When the preset is saved, the audio will mute for a

moment.

[Command_To_Player\$] This input can be used to send any arbitrary

command to the component. The module automatically appends the correct CPDID, Zone ID, sequence number, and terminating colon and

line feed to any string sent to this input.

For example, **PLAY** becomes 01.1/1/PLAY:\n for a module controlling CPDID 01 Zone ID 1.
This input provides direct access to the control

protocol.

Outputs

 $\{ \{ Tx \} \}$ Used for connection to the TX\$ signal of the

connected RS-232 or TCP/IP client.

[Now_Playing_Item\$] Information about the item currently playing. If

the user is playing a genre, it displays the genre

name. If the user is playing an album, it displays the album name. If the user is playing all music by a particular artist, the artist name is displayed.

[Now_Playing_Track\$]

The title and artist for the track currently playing given in the format <title> - <artist>.

[Play_fb], [Stop_fb], [Pause_fb],
[Fast_Forward_fb], [Rewind_fb]

Transport feedback. Only one of these signals is

active at any given time.

[Play-Pause_fb] Same feedback as [Play_fb].

[Random_fb] Indicates that the music is playing back

randomly. Note that this sometimes remains on because some music always plays back in random order. See *Music items in the Kaleidescape System* on page 14 for details.

[Repeat_fb] Indicates that the music is playing back

repeatedly. Note that this sometimes remains on because some music always repeats. See *Music* items in the *Kaleidescape System* on page 14 for

details.

[Preset1_fb] - [Preset10_fb]

Indicates when the associated preset is currently active. Multiple presets can be active

simultaneously, if the presets are set to the

music entity.

[Preset1_Label\$] - [Preset10_Label\$]

Displays the name of the genre, artist, album, or track that the preset is set to. This is the same

information that is displayed in the

[Now_Playing_Item\$] signal when the preset

is active.

Automatically updates to the latest information when a preset changes, as well as at connection.

[System_Ready] Indicates that the Kaleidescape system is ready.

[System_Becoming_Ready] Indicates that the Kaleidescape system is

becoming ready from an idle state.

[System_Not_Ready] Indicates that Kaleidescape system is idle.

Appendix F: Music Collection Module v7.1.0 Parameters and I/O

Parameters

Control Protocol Device ID (CPDID)

This must match the CPDID of the component as set through the Kaleidescape browser interface (http://my-kaleidescape/). *None* is the default.

When using *None*, the Crestron processor must be directly connected to the designated component.

Zone ID

This indicates which zone output to control on the Kaleidescape player.

Collection

The music collection that this module will cycle through. Default collections include:

- Albums by Artist
- Albums by Title
- Genres (top 40 genres in the music library)
- Mix Albums (user-defined mix albums)
- New (most recently imported albums, the time is defined in the browser interface)

User-defined collections can also be specified.

Inputs

{{Rx\$}}	Used for connection to the RX\$ signal of the connected RS-232 port or TCP/IP client.
{{Connect-F}}	Resends startup messages to get the module feedback in sync with the component. If using TCP/IP, tie this to the Connect-F output of the TCP/IP client to re-sync the feedback if the connection cycles. If using RS-232, simply put a 1 on this input.
[First], [Next], [Previous	Play the first, next or previous item in the collection.

Outputs

{{Tx\$}}
Used for connection to the TX\$ signal of the connected RS-232 or TCP/IP client.

[System_Ready] Indicates that the Kaleidescape system is ready.

[System_Becoming_Ready] Indicates that the Kaleidescape system is

becoming ready from an idle state.

[System_Not_Ready] Indicates that Kaleidescape system is idle.

Appendix G: Controller Zone Name Module v8.3.0 Parameters and I/O

This module provides an interface for volume commands and feedback between your program and instances of the Kaleidescape App for iPad configured with a controller zone name. The controller zone name in the received command is checked against the controller zone name parameter and the corresponding output is pulsed. When an input changes a string is generated with the corresponding controller zone name parameter. Only instances of the Kaleidescape App for iPad configured with the same controller zone name will respond to the feedback.

Parameters

Controller_Zone_Name_X

This must match the Controller Zone Name entered in the settings of the Kaleidescape App for iPad.

Inputs

[CZN_X_Volume Capabilities]

Sends the volume capabilities to the Kaleidescape App for iPad, supported values are:

O No volume control or feedback

- 1 Volume control but no mute or feedback
- 3 Volume and mute control but no feed back
- 5 Volume control and feedback but no mute
- 7 Volume and mute control with volume feedback
- 15 Volume and mute control with feedback

[CZN_X_Mute_On_fb], [CZN_X_Vol_Level]

The module passes this feedback to an instance of the Kaleidescape App for iPad configured with the matching controller zone name so that the user can see the current volume level and mute state in the app.

Outputs

[CZN_X_Volume_Up], [CZN_X_Volume_Down], [CZN_X_Volume Mute]

These outputs pulse to indicate volume commands were received from an instance of the Kaleidescape App for iPad configured with the matching controller zone name.

Appendix H: Revision History

Crestron OSD module

Version 8.4.0

Added support for SYSTEM_READINESS_STATE messages

Version 8.3.0

- Added support for Scale Mode
- Increased the maximum size of _symbolInstance and made the sizing dynamic to prevent errors when deeply nesting the module.
- Changed the CPDID text field to a drop down menu.
- Added "Don't send volume capabilities" to the volume capabilities drop down menu in case two modules are controlling the same zone.
- Minor bug fixes and other modifications.

Version 8.2.0

- Added support for CinemaScape mode and CinemaScape Mask.
- Added support for volume control and feedback when using the Kaleidescape App for iPad.

Version 8.1.0

Added child commands.

Version 8.0.0

- Added support for Blu-ray discs.
- Fixed a bug causing spurious messages to be dumped to the log.
- Minor bug fixes and other modifications.

Version 7.0.1

- Added support for Cinema One (1st generation).
- Significant speed improvements.
- Better handling of power state and connection status.
- Added [Zone_to_Control\$] input and [Controlling_SN.Zone\$] and [Controlling_CPDID.Zone\$] outputs.

Version 7.0

- Module reorganized to use signal roll-ups.
- Added keyboard and keypad inputs.

- Added [16x9_Frame_with_2.35_Image] and [16x9_Frame_with_2.35_Image] outputs.
- Added [Mask_Calibrated_Top] and [Mask_Calibrated_Bottom] outputs.
- Added [Random_Toggle] and [Repeat_Toggle] inputs for music playback.
- Added power status signals: [Power_on_fb] and [Power_off_fb].
- [Now_Playing_Cover_URL] can also return movie cover URLs.
- Changed join numbers in demo program.

Version 6.3.1

This version has been successfully tested using CUZ 4.0 Beta release.

- Improved high traffic performance.
- Added version number to file names.

Version 6.3.0

- Changed Connection_Reset to Connect-F in sample code to clarify its purpose.
- Fixed bug where content detail strings were sometimes overrunning the string buffer.
- Added signal to activate lighting when in the DVD menu.
- Added override capability for handling NAT for cover art URLs.
- Minor formatting and spelling corrections in code.

- Fixed bug where the play button disappears when the new music choices pop up.
- Fixed bug where setting Time Update Interval to 0 does not work.
- Added support for cover art for details browsing, including signals to indicate whether to use the DVD or CD aspect ratios.
- Modified coding style of module to reflect a single consistent style.
- Created SIMPL+ library to allow code to be used across all Crestron modules.
- Updated copyright text in the module.
- Added Virtual Serial Driver to module.
- Added signal for custom commands to be sent to the player.
- Added Virtual GUI Device driver to module.
- Linked module help function to this document.

- Added System Builder Device Support definitions so that the module can more easily be found in the database.
- Modified signal names to hide unnecessary signals in System Builder.
- Modified many signal names to clarify their purpose.

Crestron SATP module

Version 8.4.0

Added support for SYSTEM READINESS STATE messages

Version 8.3.0

- Increased the maximum size of _symbolInstance and made the sizing dynamic to prevent errors when deeply nesting the module.
- Changed the CPDID text field to a drop down menu.
- Added "Don't send volume capabilities" to the volume capabilities drop down menu in case two modules are controlling the same zone.
- Minor bug fixes and other modifications.

Version 8.2.0

Added support for volume control and feedback when using the Kaleidescape App for iPad.

Version 8.1.0

- Fixes an out-of-bounds array reference introduced in 8.0.0.
- Fixed a bug in version 8.0.0 that could cause the Crestron processor to lock up when used with CUZ 4.x prior to 4.003. Note that lockup usually takes a fairly long time to occur. All users of SATP 8.0.0 are strongly encouraged to update to 8.1.0.

Version 8.0.0

Fixed the buffer overrun bug.

Version 7.0.1

- Significant speed improvements.
- Better handling of power state and connection status.
- The SATP Now Playing list now defaults to the currently playing track.
- The SATP search button is now suppressed on top Browse node. Searching on the top node is not supported.
- Better handling of an invalid SATP node. If an SATP interface is showing a collection while the collection is deleted, the interface will correctly move to a valid node.

Version 7.0

- Module reorganized to use signal roll-ups.
- Added version number to file names.
- Added keyboard and keypad inputs.
- Changed join numbers in demo program.
- Added [Random_Toggle] and [Repeat_Toggle] inputs for music playback.
- Added [Zone_Name\$] to return the name of the currently controlled zone.

Version 6.3.0

- Changed Connection_Reset to Connect-F in sample code to clarify its purpose.
- Corrected system name in sample program.
- Fixed bug where the module would sometimes not initialize properly if using command redirection.
- Modified nomenclature inside the module to clarify the browse protocol implementation.
- Minor formatting and spelling corrections in code.

- Added help text to Crestron SATP module.
- Removed deprecated signals from module.
- Fixed bug where too many search results were being returned.
- Modified parsing routines to significantly improve module performance.
- Modified coding style of module to reflect a single consistent style.
- Created SIMPL+ library to allow code to be used across all Crestron modules.
- Updated copyright text in the module.
- Enabled signal containing URL for the cover art of the currently playing album.
- Added Virtual Serial Driver to module.
- Added signal for custom commands to be sent to the player.
- Added Virtual GUI Device driver to module.
- Linked module help function to this document.
- Added System Builder Device Support definitions so that the module can more easily be found in the System Builder database.

- Modified signal names to hide unnecessary signals in System Builder.
- Modified many signal names to clarify their purpose.

Crestron Keypad module

Version 7.1.0

Added support for SYSTEM_READINESS_STATE messages

Version 7.0.3

- Increased the maximum size of _symbolInstance and made the sizing dynamic to prevent errors when deeply nesting the module.
- Changed the CPDID text field to a drop down menu.

Version 7.0.2

- Significant speed improvements.
- Better handling of power state and connection status.

Version 7.0.1

Added version number to file names.

Version 7.0.0

- Changed Connection_Reset to Connect-F in sample code.
- Added signals to output labels for each preset.
- Added First/Next/Previous inputs to browse presets.
- Added Now Playing item output to display a plain text string indicating what is currently playing.
- Minor formatting and spelling corrections in code.

- Modified coding style of module to reflect a single consistent style.
- Created SIMPL+ library to allow code to be used across all Crestron modules.
- Update copyright text, Crestron code.
- Added Virtual Serial Driver to module.
- Added signal for custom commands to be sent to the player.
- Linked module help function to this document.
- Added System Builder Device Support definitions so that the module can be more easily found in the database.
- Modified signal names to hide unnecessary signals in System Builder.

Modified many signal and variable names to clarify their purpose.

Version 6.1.0

Initial implementation of keypad API.

Crestron Controller Zone Name (CZN) module

Version 8.3.0

Initial release of the module to parse volume commands coming from the Kaleidescape App for iPad configured with a Controller Zone Name.

Crestron touch panel templates

Versions Dated 2011-03-01

Added search and jump to collections page.

Versions Dated 2010-04-29

- Added Blu-ray disc color buttons to templates.
- References to DVD replaced by generic references to "Disc."
- Removed favorite scenes buttons.
- Changed select button to OK button.
- Removed the alphabetize button.

Versions Dated 2008-08-08

- Changed join numbers.
- Added repeat and random buttons to OSD-no-Video.
- Updated templates for current generation of Crestron touch panel hardware (e.g., TPS-15 instead of TPS-6000).

- Fixed bug where the Now Playing view was not showing **Paused** status.
- Updated the copyright text.
- Fixed bug where the play button disappears when the new music choices pop up.
- Added dynamic graphics object to OSD No Video details sub-pages. Split sub-page into two pages to handle different aspect ratios. This allows the cover art for the selection currently highlighted on the OSD to be displayed on the touch panel.
- Added dynamic graphics object to the now playing music bug for SATP and OSD to show the cover art for the currently playing music album.

•	Placed a PLAY button over the browse cover on OSD No Video touch panel templates.

Notices

Document Name: Programming Crestron Controllers for a Kaleidescape System

Document Number: 101-0130-00

Permanent Link: www.kaleidescape.com/go/programming-crestron-controllers

Publication Date: May 2015

This document revision corresponds to kOS version 6.1, Kaleidescape OSD and SATP modules version 8.4.0, Zone Name module 8.3, and Keypad modules 7.1.0.

This document is for informational purposes only. Kaleidescape makes no representations or warranties, express or implied, regarding the accuracy or completeness of the information contained herein and Kaleidescape shall have no obligation to provide updates to this information in the future.

Copyright © 2009–2015 Kaleidescape, Inc. All rights reserved. Kaleidescape and the Kaleidescape logo are trademarks of Kaleidescape, Inc. and are registered in the United States and certain other jurisdictions. iPad and Mac are trademarks of Apple Inc. Other trademarks and trade names are owned by third parties and may be registered in some jurisdictions.