


Partner: Digital Projection
Model: Titan
Device Type: DLP Projector



GENERAL INFORMATION

SIMPLWINDOWS NAME:	Digital Projection Titan Serial
CATEGORY:	TV Video Projector
VERSION:	2.0
SUMMARY:	Provides control of the Digital Projection Titan series projectors via RS-232.
GENERAL NOTES:	Provides control of the Digital Projection Titan series projectors via RS-232. This was tested with a Titan 800 1080p 3D projector.
CRESTRON HARDWARE REQUIRED:	2-Series Processor w/two-way RS-232 enabled port, 3-Series Processor w/two-way RS-233 enabled port.
SETUP OF CRESTRON HARDWARE:	RS-232 Baud Rate: 38400 Parity: None Data Length: 8 Stop Bits: 1
VENDOR FIRMWARE:	Scaler BL 07 FW 2-8-1G 0354 DP Interface: 53.35
VENDOR SETUP:	N/A
CABLE DIAGRAM:	CNSP-121

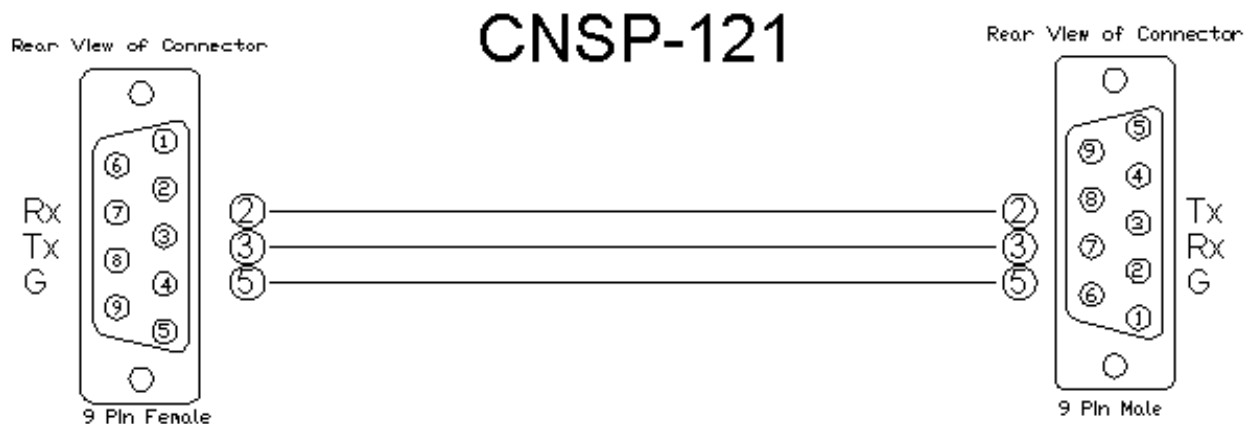

Partner: Digital Projection
Model: Titan
Device Type: DLP Projector


CONTROL:

Power_<On/Off/Toggle>	D	Pulse to turn unit on or off.
Input_*	D	Pulse to select the input.
Aspect_*	D	Pulse to set the aspect mode.
PIP_Mode_<Off/PIP/PAP/POP>	D	Pulse to set the PIP mode.
PIP_Input_*	D	Pulse to set the PIP input.
PIP_Size_<Small/Medium/Large>	D	Pulse to set the PIP size.
PIP_Position_*	D	Pulse to set the PIP position.
PIP_Position_Custom	D	Pulse to set PIP position to custom.
PIP_H_Position_<Right/Left>	D	Press to adjust the custom PIP horizontal position.
PIP_V_Position_<Up/Down>	D	Press to adjust the custom PIP vertical position.
*3D_<On/Off>	D	Pulse to turn 3D on or off.
*3D_Mult_<1X/2X/3X>	D	Pulse to adjust the 3D multiplier value.
3D_Format_	D	Pulse to set the 3D format.
*3D_Darktime_<0us/650us/1300us/7500us>	D	Pulse to set the 3D darktime.
*3D_Polarity_<Pos/Neg>	D	Pulse to set 3D polarity to positive or negative.
*3D_Dominance_<Left/Right>	D	Pulse to set 3D dominance to left or right.
*3D_SDI_Stream_<1/2>	D	Pulse to set SDI stream to 1 or 2.
Shutter_<Open/Close/Toggle>	D	Pulse to open or close shutter.
Freeze_<On/Off/Toggle>	D	Pulse to turn freeze on or off.
Lens_<Up/Down/Left/Right>	D	Press to adjust the lens position.
Lens_Center	D	Pulse to center the lens.
Zoom_<In/Out>	D	Press to zoom in or out.
Focus_<Near/Far>	D	Press to focus near or far.

Partner: Digital Projection
Model: Titan
Device Type: DLP Projector



Lens_Preset_<1-10>	D	Pulse to select the lens preset. Press and hold for 5 seconds to store current settings to the lens preset selected.
Brightness_<Up/Down>	D	Press to adjust brightness.
Contrast_<Up/Down>	D	Press to adjust contrast.
Lamp_Mode_*	D	Pulse to select the lamp mode..
From_Device	S	Connect to "RX\$" output of Com Port definition.

FEEDBACK:

Power_Is_<On/Off>	D	Indicates that the power is on or off.
Input_Is_*	D	Indicates which input is selected.
Aspect_Is_*	D	Indicates which aspect is selected.
PIP_Mode_Is_<Off/PIP/PAP/POP>	D	Indicates the current PIP mode.
PIP_Input_Is_*	D	Indicates the current PIP input.
PIP_Size_Is_<Small/Medium/Large>	D	Indicates the current PIP size.
PIP_Position_Is_*	D	Indicates the current PIP position.
PIP_Position_Is_Custom	D	Indicates that the PIP position is set to custom.
PIP_H_Position_Gauge	A	Indicates the custom PIP horizontal position for a gauge object.
PIP_H_Position_Text	S	Indicates the custom PIP horizontal position for an indirect text field.
PIP_V_Position_Gauge	A	Indicates the custom PIP vertical position for a gauge object.
PIP_V_Position_Text	S	Indicates the custom PIP vertical position for an indirect text field.
*3D_Is_<On/Off>	D	Indicates that 3D is currently on or off.
*3D_Mult_Is_<1X/2X/3X>	D	Indicates the 3D multiplier value selected.
3D_Format_Is_	D	Indicates the 3D format that is selected.
*3D_Darktime_Is_<0us/650us/1300us/7500us>	D	Indicates the 3D darktime that is selected.
*3D_Polarity_Is_<Pos/Neg>	D	Indicates the 3D polarity that is selected.

Partner: Digital Projection
Model: Titan
Device Type: DLP Projector



*3D_Dominance_Is_<Left/Right>	D	Indicates the 3D dominance setting.
*3D_SDI_Stream_Is_<1/2>	D	Indicates the 3D SDI stream setting.
Shutter_Is_<Open/Close>	D	Indicates that the shutter is currently open or closed.
Freeze_Is_<On/Off>	D	Indicates that freeze is currently on or off.
Lens_Preset_<1-10>_Is_Selected	D	Indicates that a lens preset is selected.
Brightness_Gauge	A	Indicates the brightness setting for a gauge object.
Brightness_Text	S	Indicates the brightness setting for an indirect text field.
Contrast_Gauge	A	Indicates the contrast setting for a gauge object.
Contrast_Text	S	Indicates the contrast setting for an indirect text field.
Lamp_Mode_Is_*	D	Indicates the current lamp mode setting.
Lamp_<1-4>_Hours_Text	S	Indicates the current lamp hours.
Lamp_<1-4>_Strikes_Text	S	Indicates the number of lamp strikes.
Please_Wait	D	Use to display a "Please Wait" subpage.
To_Device	S	Connect to "TX\$" input of COM Port definition

TESTING:

OPS USED FOR TESTING:	2-Series: v4.007.0005 3-Series: v1.008.0040
SIMPL WINDOWS USED FOR TESTING:	v4.02.38
DEVICE DB USED FOR TESTING:	v55.00.002.00
CRES DB USED FOR TESTING:	v44.05.005.00
SYMBOL LIBRARY USED FOR TESTING:	v889
SAMPLE PROGRAM:	2 Series: Digital Projection Titan Serial v2.0 Demo PRO2.smw 3 Series: Digital Projection Titan Serial v2.0 Demo CP3.smw
REVISION HISTORY:	v2.0