


Partner: Cary Audio
Model: Cinema-6
Device Type: Surround Processor



GENERAL INFORMATION

SIMPLWINDOWS NAME:	Cary Audio Cinema-6 Surround Processor
CATEGORY:	Receiver/Processor
VERSION:	1.0
SUMMARY:	This module controls the Cary Audio Cinema-6. It does not provide feedback.
GENERAL NOTES:	This module controls the Cary Audio Cinema-6 surround sound processor. It does not provide feedback due to limitations of the Cinema-6.
CRESTRON HARDWARE REQUIRED:	CNXC0M, CNXC0M-2, ST-COM, C2COM, C2COM-2, C2COM-3
SETUP OF CRESTRON HARDWARE:	RS232 Baud: 9600 Parity: None Data Bits: 8 Stop Bits: 1
VENDOR FIRMWARE:	None
VENDOR SETUP:	None
CABLE DIAGRAM:	CNSP-121

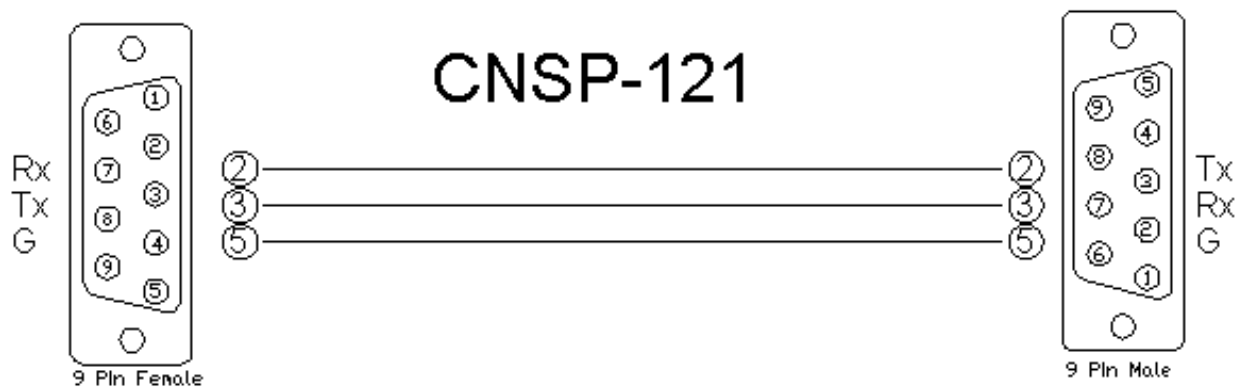

Partner: Cary Audio
Model: Cinema-6
Device Type: Surround Processor

**CONTROL:**

Power_On/Off/Toggle	D	Pulse to turn the Cinema-6 on and off.
Volume_Up/Down	D	Press and hold to adjust the volume.
Volume_Mute	D	Pulse to turn the volume mute on and off.
Input_Mode_*	D	Pulse to select the input mode.
Input_*	D	Pulse to select the input.
Input_+/-	D	Pulse to cycle through the inputs.
Surround_*	D	Pulse to select the surround mode.
Zone	D	Pulse to select the input for Zone 2.
Speaker	D	Pulse to enter the speaker set up menu.
Test	D	Pulse to enter the test set up menu.
Delay	D	Pulse to enter the delay set up menu.
Brightness	D	Pulse to enter the front panel brightness set up menu.
Late	D	Pulse to enter the late set up menu.
Setup_Menu	D	Pulse to enter the set up menus.
Menu_Up/Down/Left/Right/Select/Exit	D	Pulse to navigate through the menus.

FEEDBACK:

To_Device\$	S	Serial signal to be routed to a serial com port.
-------------	---	--

Partner: Cary Audio
Model: Cinema-6
Device Type: Surround Processor

**TESTING:**

OPS USED FOR TESTING:	PRO2: 3.137 CNMSX-Pro: 5.14.02x
COMPILER USED FOR TESTING:	2.05.22
SAMPLE PROGRAM:	Cary Audio Cinema-6 Demo
REVISION HISTORY:	V. 1.0