


Partner: Stewart Filmscreen
Model: eNode + IBT-100
Device Type: Screen



GENERAL INFORMATION

SIMPLWINDOWS NAME:	Stewart Filmscreen eNode+IBT-100 IMC Motor Control v1.0
CATEGORY:	Shades/Drapes
VERSION:	1.0
SUMMARY:	This module controls Stewart Filmscreen IMC motors.
GENERAL NOTES:	This module controls Stewart Filmscreen IMC motors.
CRESTRON HARDWARE REQUIRED:	C2ICOM, C2COM-2/3, C2ENET-1/2
SETUP OF CRESTRON HARDWARE:	RS232 Baud: 57600 Parity: None Data Bits: 8 Stop Bits: 1 UDP/IP Port: 5000
VENDOR FIRMWARE:	VERSION_HW: 02.00 VERSION_SW: 01.19
VENDOR SETUP:	The listen and send ports should both be set to the same port number.
CABLE DIAGRAM:	CNSP-121 or Ethernet

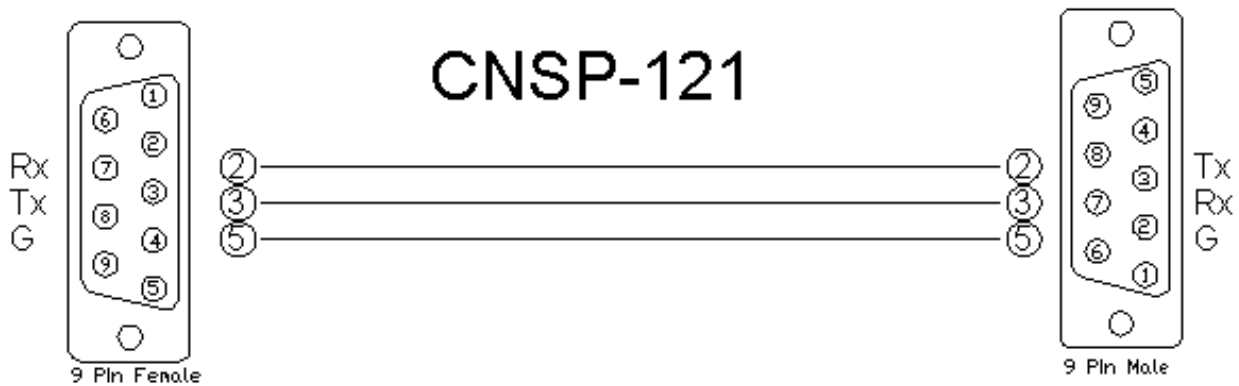

Partner: Stewart Filmscreen
Model: eNode + IBT-100
Device Type: Screen


CONTROL:

Up/Down/Stop	D	Pulse to control the motor. Pulsing up or down will make the motor to move in that direction until it reaches the limit or until it receives the stop command.
---------------------	---	--

PARAMETER:

Zone Number	P	Enter the zone number for the motor to control. Use 0 to control all zones.
Group Number	P	Enter the group number for the motor to control. Use 0 to control all groups in the zone.
Node Number	P	Enter the node number for the motor control. Use 0 to control all nodes in the zone and group.

FEEDBACK:

To_Queue	S	Serial signal to be routed to the From_Modules input on either the Stewart Filmscreen eNode Queue v1.0 or the Stewart Filmscreen IBT-100 Queue v1.0 module.
-----------------	---	---

TESTING:

OPS USED FOR TESTING:	4.001.1012
SIMPL WINDOWS USED FOR TESTING:	2.12.31
CRESTRON DB USED FOR TESTING:	21.03.028.00
DEVICE DB USED FOR TESTING:	27.00.001.00
SAMPLE PROGRAM:	Stewart Filmscreen IBT-100 v1.0 Demo or Stewart Filmscreen eNode v1.0 Demo
REVISION HISTORY:	V. 1.0 – Original Release.