


Partner: Symetrix
Model: SymNet & IS 780 + 760 + 722
Device Type: DSP



GENERAL INFORMATION

| | |
|------------------------------------|---|
| SIMPLWINDOWS NAME: | Symetrix Symnet + Integrator Series 780 + 760 + 722 Switch Selector v1.0 |
| CATEGORY: | Mixer |
| VERSION: | 1.0 |
| SUMMARY: | This module will control any input selector module in a SymNet Device or the Integrator Series 780, 760 or 722. |
| GENERAL NOTES: | This module will control the Symetrix SymNet devices. It will also control the Integrator Series 780, 760 or 722 devices. There is a parameter for controller number for the input selector. For the SymNet devices this number is set by the person programming the SymNet. For the Integrator Series devices, this number is preprogrammed from the factory. There are so many control points in the Integrator Series devices that the controller numbers could not be listed here. For a list of the controller numbers for the Integrator Series devices please download the Integrator Series External Control Protocol document from the Symetrix web site. Appendices A, B and C detail the controller numbers for each of the Integrator Series devices. |
| CRESTRON HARDWARE REQUIRED: | CNXCOM-6, CNXCOM-2, ST-COM, C21-COM-*, C2-COM2/3, C2-ENET1/2 |
| SETUP OF CRESTRON HARDWARE: | SymNet RS232 Baud: 38400 Parity: None Data Bits: 8 Stop Bits: 1 Integrator Series RS232 Baud: 57600 Parity: None Data Bits: 8 Stop Bits: 1 SymNet and Integrator Series UDP/IP Port: 48630 |
| VENDOR FIRMWARE: | SymNet: 7.003 Integrator Series: Unknown |
| VENDOR SETUP: | SymNet devices will need to have the controller numbers set when programming the SymNet device. |
| CABLE DIAGRAM: | CNSP-121 |

Partner: Symetrix
 Model: SymNet & IS 780 + 760 + 722
 Device Type: DSP

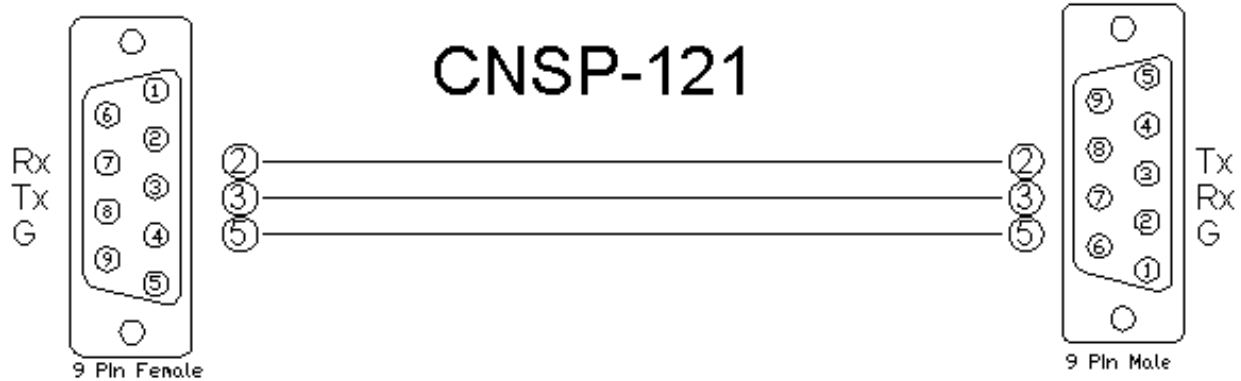

CONTROL:

| | | |
|--------------------|---|---|
| Input | A | Analog value for the input number to select. |
| From_Device | S | Serial signal to be routed from a 2-way serial com port or a UDP/IP symbol. |

PARAMETERS:

| | | |
|--------------------------|---|---|
| Controller Number | P | Enter the controller number for the fader you wish to control. This requires 5 digits so you must enter leading zeroes. i.e. 42 would be entered as 00042 |
| Number Of Inputs | P | Select the number of inputs from the drop down menu. |

FEEDBACK:

| | | |
|----------------------------|---|--|
| Input_Digital_Gauge | A | Analog output indicating the currently selected input. To be displayed using a digital gauge on a touch panel. |
| To_Device | S | Serial signal to be routed to a 2-way serial com port or UDP/IP symbol. |

Partner: Symetrix
Model: SymNet & IS 780 + 760 + 722
Device Type: DSP

**TESTING:**

| | |
|--|---|
| OPS USED FOR TESTING: | 3.155.1240 |
| SIMPL WINDOWS USED FOR TESTING: | 2.10.32 |
| CRESTRON DB USED FOR TESTING: | 20.00.015.00 |
| DEVICE DB USED FOR TESTING: | 20.02.009.00 |
| SAMPLE PROGRAM: | Symetrix SymNet + Integrator Series 780 + 760 + 722 v1.0 Demo |
| REVISION HISTORY: | V. 1.0 |