


Partner: Sony
 Model: VPL-VW90ES
 Device Type: LCD Projector



GENERAL INFORMATION

SIMPLWINDOWS NAME:	Sony VPL-VW90ES v1.0
CATEGORY:	TV/Video Projector
VERSION:	1.0
SUMMARY:	Power, Source Select, Picture Mute, Lamp Mode, Lamp Light Mode, Aspect Ratio, Picture Mode, Contrast, Brightness, Color, Hue, Sharpness, Volume, Lens Control and Elapsed Lamp Hours.
GENERAL NOTES:	<p>This module will control the Sony VPL-VW90ES projector. True feedback is provided for all functions including elapsed lamp hours. When any command is sent to the projector, it will acknowledge that the command was processed properly and the corresponding feedback will be reflected at the outputs of this module. Picture settings will only be updated when the appropriate input is selected.</p> <p>NOTE: Be aware that the menu navigation functions may control a source device via HDMI CEC control if it is enabled on the projector and the particular source device. This can be disabled on the projector if desired via its on-screen menu.</p> <p>This module was tested with the Sony VPL-VW90ES. Sony uses the same protocol on most of their projectors. This module should also work on the following model:</p> <ul style="list-style-type: none"> • VPL-VW85 <p>This module is System Builder compatible.</p>
CRESTRON HARDWARE REQUIRED:	C21-COM6, C2-COM2/3, CNXCOM-6, CNX-COM2, ST-COM
SETUP OF CRESTRON HARDWARE:	<p>RS232</p> <p>Baud: 38400</p> <p>Parity: Even</p> <p>Data Bits: 8</p> <p>Stop Bits: 1</p>
VENDOR FIRMWARE:	N/A
VENDOR SETUP:	Standby Mode must be set to "Standard" in order to enable polling while the projector is off. This is done via the projector's on-screen menu. If not, the "Is_Cooling_Down" output signal will not go low after projector is done cooling down.
CABLE DIAGRAM:	CNSP-122

Partner: Sony
Model: VPL-VW90ES
Device Type: LCD Projector

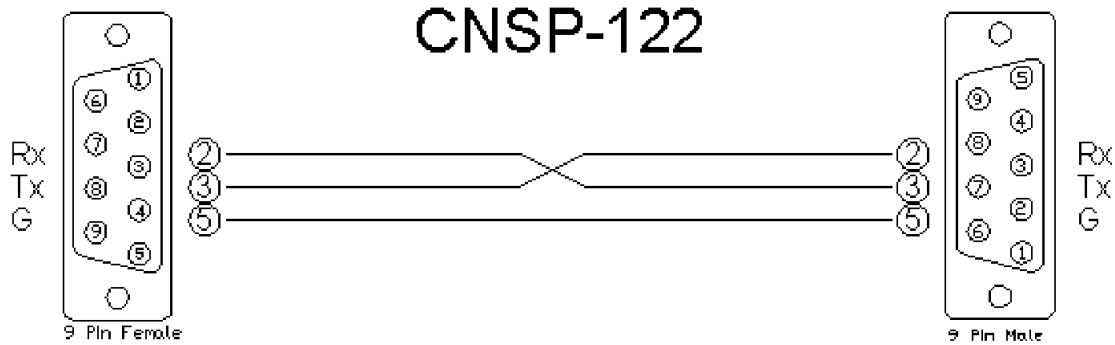

CONTROL:

Power_<On/Off/Toggle>	D	Pulse to turn the projector on or off.
Input_*	D	Pulse to select the desired input (S-Video for VPL-VW85 only).
Aspect_*	D	Pulse to set the aspect ratio.
Picture_Mode_*	D	Pulse to set the picture mode (User_1 for VPL-VW85 only, User_2 for VPL-VW90ES only).
Lamp_Control_<High/Low/Toggle>	D	Pulse to set the lamp brightness.
Picture_Mute_<On/Off/Toggle>	D	Pulse to turn picture mute on or off.
Menu	D	Pulse to enter or exit on screen menu.
Up	D	Pulse to navigate on screen menu.
Down	D	Pulse to navigate on screen menu.
Left	D	Pulse to navigate on screen menu.
Right	D	Pulse to navigate on screen menu.
Enter	D	Pulse to select highlighted item in menu.
Contrast_<Up/Down>	D	Press to adjust contrast.
Brightness_<Up/Down>	D	Press to adjust brightness.
Color_<Up/Down>	D	Press to adjust color.
Hue_<Up/Down>	D	Press to adjust hue.

Partner: Sony
Model: VPL-VW90ES
Device Type: LCD Projector



Sharpness_<Up/Down>	D	Press to adjust sharpness.
Focus_<In/Out>	D	Press to adjust focus.
Zoom_<In/Out>	D	Press to adjust zoom.
Lens_Shift_*	D	Press to adjust lens shift.
Keystone_<Up/Down>	D	Press to adjust keystone.
Advanced_Iris_*	D	Pulse to set advance iris setting.
Real_Color_*	D	Pulse to select desired real color mode.
Film_Mode_*	D	Pulse to set film mode.
Motion_Enhancer_*	D	Pulse to select motion enhancer setting.
Set_2D-3D_Display_*	D	Pulse to select 2D or 3D display output.
Set_3D_Format_*	D	Pulse to select the type of 3D format.
Set_3D_Depth_*	D	Pulse to select the 3D depth.
Simulated_3D_Effect_*	D	Pulse to select the type of simulated 3D effect.
Set_3D_Glasses_Brightness_*	D	Pulse to set brightness of 3D glasses.
Poll_Enable	D	Latch high to enable polling.
Poll_Settings	D	Latch high to enable polling of settings.
From_Device	S	Serial signal to be routed from a 2-way serial com port.

Partner: Sony
Model: VPL-VW90ES
Device Type: LCD Projector


FEEDBACK:

Power_Is_<On/Off>	D	High to indicate the current power state.
Is_Warming_Up	D	High to indicate that the projector is warming up.
Is_Cooling_Down	D	High to indicate that the projector is cooling down.
Input_Is_*	D	High to indicate the current input.
Aspect_Is_*	D	High to indicate the current aspect.
Picture_Mode_Is_*	D	High to indicate the current picture mode selected.
Lamp_Control_Is_<High/Low>	D	High to indicate the lamp brightness setting.
Picture_Mute_Is_<On/Off>	D	High to indicate if picture mute is on or off.
Contrast_Gauge	A	Analog value indicating current contrast value.
Brightness_Gauge	A	Analog value indicating current brightness value.
Color_Gauge	A	Analog value indicating current color value.
Hue_Gauge	A	Analog value indicating current hue value.
Sharpness_Gauge	A	Analog value indicating current sharpness value.
Advanced_Iris_Is_*	D	High to indicate current advanced iris setting.
Real_Color_Is_*	D	High to indicate real color setting.
Film_Mode_Is_*	D	High to indicate film mode setting.
Motion_Enhancer_Is_*	D	High to indicate current motion enhancer setting.
Set_2D-3D_Display_Is_*	D	High to indicate 2D or 3D display output.
Set_3D_Format_Is_*	D	High to indicate the type of 3D format.
Set_3D_Depth_Is_*	D	High to indicate the 3D depth.
Simulated_3D_Effect_Is_*	D	High to indicate the type of simulated 3D effect.
Set_3D_Glasses_Brightness_Is_*	D	High to indicate the brightness of the 3D glasses.
Lamp_Hours	A	Analog value indicating lamp hours.

Partner: Sony
Model: VPL-VW90ES
Device Type: LCD Projector



To_Device	S	Serial signal to be routed to a 2-way serial com port.
-----------	---	--

TESTING:

OPS USED FOR TESTING:	4.001.1012
SIMPL WINDOWS USED FOR TESTING:	3.01.24
CRES DB USED FOR TESTING:	24.05.003.00
DEVICE DB USED FOR TESTING	32.05.002.00
SYMBOL LIBRARY USED FOR TESTING:	712
SAMPLE PROGRAM:	Sony VPL-VW90ES v1.0 Demo PRO2.smw
REVISION HISTORY:	V. 1.0 – Original release.