

Partner: Epson
Model: PowerLite 1925W
Device Type: LCD Projector




GENERAL INFORMATION

SIMPLWINDOWS NAME:	Epson PowerLite 1925W Serial v1.0
CATEGORY:	Video/Data Projector
VERSION:	1.0
SUMMARY:	This module will control via RS-232 Power, Source Select, A/V mute, Aspect, Freeze, Brightness, Contrast, Sharpness, Volume and elapsed Lamp Hour usage.
GENERAL NOTES:	<p>This module will control the Epson PowerLite 84 Projector. True feedback is provided for power, input sources, a/v mute, freeze, aspect ratio and picture settings. When any command is sent to the projector, it will acknowledge that the command was processed properly and the corresponding feedback will be reflected at the outputs of this module.</p> <p>If it is desired to poll the projector for power state, you can assert the Poll_Enable input. When this input is high, the projector will be polled every 15 seconds to determine the state of power. If it is desired to poll the projector for picture setting changes made using the IR remote control, or by the controls on the projector itself, you can assert the Poll_Settings input. When this input is high, the projector will be polled every 45 seconds to determine the state of input source, picture mute, freeze, aspect ratio, brightness, contrast, sharpness, color, tint, volume and elapsed lamp hours. Typically, you could enable either polling option when the projector's particular control page is active and displayed on a touch panel. You would then disable polling at other times.</p>
CRESTRON HARDWARE REQUIRED:	C2I-COM6, C2NCOM-2/3, CNX-COM6, CNX-COM2, SY-COM
SETUP OF CRESTRON HARDWARE:	RS232 Baud: 19200 Parity: None Data Bits: 8 Stop Bits: 1
VENDOR FIRMWARE:	None
VENDOR SETUP:	None
CABLE DIAGRAM:	CNSP-124

Partner: Epson
Model: PowerLite 1925W
Device Type: LCD Projector




Rear View of Connector

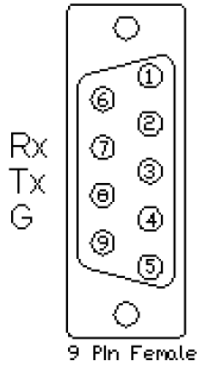

CNSP-124

Rear View of Connector

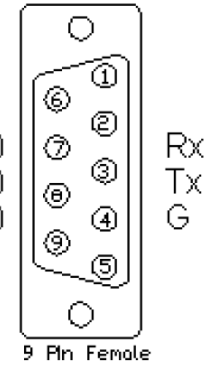

CONTROL:		
Power_On	D	Turn projector on.
Powerr_Off	D	Turn projector off.
Power_Toggle	D	Turn projector on or off.
Input_Computer_1	D	Selects projector's computer 1 input.
Input_Computer_2	D	Selects projector's computer 2 input.
Input_S-Video	D	Selects projector's S-Video input.
Input_Video	D	Selects projector's video input.
Input_HDMI	D	Selects projector's HDMI input
Input_USB_Display	D	Selects projector's USB display input.
Input_USB_1	D	Selects projector's USB 1 input.
Input_USB_2	D	Selects projector's USB 1 input.
Input_LAN	D	Selects projector's LAN input.
AV_Mute_On	D	Selects A/V mute on.
AV_Mute_Off	D	Selects A/V mute off.
AV_Mute_Toggle	D	Selects A/V mute on or off.
Freeze_On	D	Selects freeze mode on.

Partner: Epson
Model: PowerLite 1925W
Device Type: LCD Projector



Freeze_Off	D	Selects freeze mode off.
Freeze_Toggle	D	Selects freeze mode on or off.
Aspect_*	D	Selects Normal / 16:9 / Auto / Full / Zoom / Real screen aspect ratios.
Contrast_Up/Down	D	Adjusts contrast setting up/down.
Brightness_Up/Down	D	Adjusts brightness setting up/down.
Sharpness_Up/Down	D	Adjusts sharpness setting up/down.
Volume_Up/Down	D	Adjusts volume setting up/down.
Poll_Enable	D	When high, projector will be polled for its general settings every 15 seconds.
Poll_Settings	D	When high, projector will be polled for its picture settings every 45 seconds.
From_Device	S	Serial signal to be routed from an RS-232C port

FEEDBACK:

Power_Is_On/Off	D	High to indicate the current power state.
Input_Is_*	D	True feedback indicating current selected input source.
A/V_Mute_Is_On/Off	D	True feedback indicating current A/V mute state.
Freeze_Is_On/Off	D	True feedback indicating current picture mute state.
Aspect_Is_*	D	True feedback indicating current aspect ratio.
*_Gauge	A	Analog value of picture/volume settings to be sent to a gauge.
Lamp_Hours	A	Decimal value of device's elapsed lamp hour usage.
To_Device	S	Serial data signal to be routed to an RS-232C port.

Partner: Epson
Model: PowerLite 1925W
Device Type: LCD Projector

**TESTING:**

OPS USED FOR TESTING:	v4.001.1012
SIMPL WINDOWS USED FOR TESTING:	2.12.30
CRES DB USED FOR TESTING:	21.03.023.00
DEVICE DATABASE:	26.06.006.00
SYMBOL LIBRARY USED FOR TESTING:	657
SAMPLE PROGRAM:	Epson PowerLite 1925W Serial v1.0 Demo
REVISION HISTORY:	v1.0 – Original release.