


Partner: Ambient Sound
Model: GSW-63
Device Type: Switcher



GENERAL INFORMATION

SIMPLWINDOWS NAME:	Ambient Sound GSW-63 Switcher
CATEGORY:	Switcher
VERSION:	1.0
SUMMARY:	This module will control an Ambient Sound GSW-63 switcher. Feedback is not provided
GENERAL NOTES:	You must first select if you want to control video only, audio only, or both video and audio. After making this selection, pressing any of the Output_*_Input_* functions will cause a switch to occur immediately.
CRESTRON HARDWARE REQUIRED:	CNX-COM, C2-COM, ST-COM
SETUP OF CRESTRON HARDWARE:	RS232 Baud: 9600 Parity: None Data Bits: 8 Stop Bits: 1
VENDOR FIRMWARE:	None
VENDOR SETUP:	None
CABLE DIAGRAM:	CNSP-121

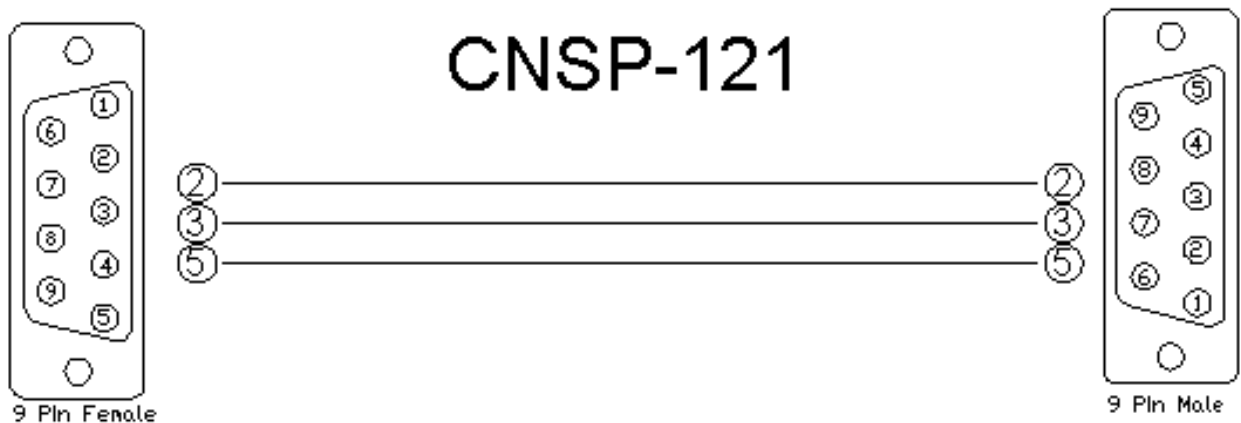

Partner: Ambient Sound
Model: GSW-63
Device Type: Switcher

**CONTROL:**

Video+_Audio	D	Pulse to select both video and audio levels for switching
Video_Only	D	Pulse to select to switch only the video level
Audio_Only	D	Pulse to select to switch only the audio level
Output_1_Output_1-6	D	Pulse to select an input for output 1
Output_2_Output_1-6	D	Pulse to select an input for output 2
Output_3_Output_1-6	D	Pulse to select an input for output 3

FEEDBACK:

Video+_Audio_Fb	D	Indicates that you are controlling/monitoring both audio and video levels
Video_Only_Fb	D	Indicates that you are controlling/monitoring the video level only
Audio_Only_Fb	D	Indicates that you are controlling/monitoring the Audio level only
To_Device\$	S	Serial signal to be routed to a 2-way RS232 port

TESTING:

OPS USED FOR TESTING:	V3.088.cuz, 5.12.63x.upz
COMPILER USED FOR TESTING:	SimplWindows Version 2.05.17
SAMPLE PROGRAM:	Ambient Sound GSW-63 Demo
REVISION HISTORY:	None