


Partner: Canon
Model: SX50
Device Type: Video Projector



GENERAL INFORMATION

SIMPLWINDOWS NAME:	Canon SX50 IR Emulation
CATEGORY:	TV/Video Projector
VERSION:	1.0
SUMMARY:	This module emulates the IR Remote control for the Canon SX50.
GENERAL NOTES:	This module emulates the IR Remote control for the Canon SX50. You MUST pulse the Initialize input to start communications. NOTE: THIS MODULE CANNOT BE USED AT THE SAME TIME AS THE Canon SX50 CONTROL MODULE.
CRESTRON HARDWARE REQUIRED:	CNXCOM-6, CNX-COM2, ST-COM, C21-COM, C2COM-2, C2COM-3
SETUP OF CRESTRON HARDWARE:	RS232 Baud: 19200 Parity: None Data Bits: 8 Stop Bits: 2
VENDOR FIRMWARE:	N/A
VENDOR SETUP:	None
CABLE DIAGRAM:	CNSP-543

Rear View of Connector

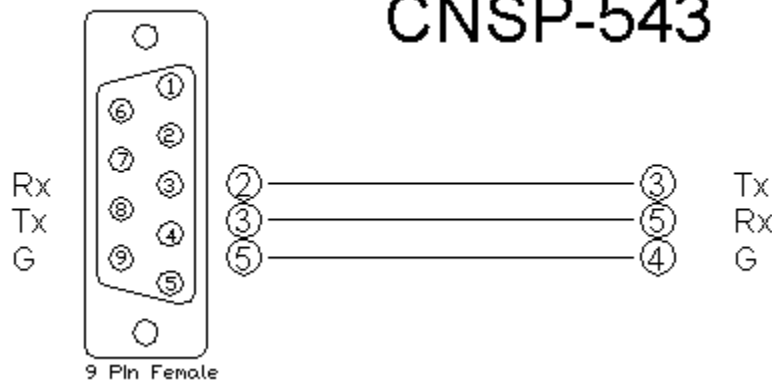

Partner: Canon
Model: SX50
Device Type: Video Projector

**CONTROL:**

Power	D	Pulse to turn the projector on and off.
Menu	D	Pulse to turn the menu on and off.
Computer_*	D	Pulse to select one of the computer inputs.
Video	D	Pulse to select the video input.
Auto_PC	D	Pulse to auto sync the PC input.
Keystone	D	Pulse to activate the keystone function.
Up/Down/Left/Right	D	Pulse to move through the menus.
Ok	D	Pulse to select an item in the menus.
R-Click	D	Pulse to activate the right click function.
Page_Up/Down	D	Pulse to page up or down.
Image	D	Pulse to activate the image function.
Freeze	D	Pulse to turn the freeze function on and off.
Volume_Up/Down	D	Pulse to adjust the volume.
No_Show	D	Pulse to turn the picture mute on and off.
Mute	D	Pulse to turn the volume mute on and off.
P-Timer	D	Pulse to activate the P-Timer function.
D-Zoom_Up/Down	D	Pulse to adjust the digital zoom.
Spot	D	Pulse to activate the Spot function.
Initialize	D	Pulse to start communications.

Partner: Canon
Model: SX50
Device Type: Video Projector

**FEEDBACK:**

To_Device\$	S	Serial signal to be routed to a serial com port.
-------------	---	--

TESTING:

OPS USED FOR TESTING:	PRO2: 3.137 CNMSX: 5.14.02x
COMPILER USED FOR TESTING:	2.05.22
SAMPLE PROGRAM:	Canon SX50 IR Emulation Demo
REVISION HISTORY:	V. 1.0