


Partner: Runco
Model: VX22d
Device Type: Video Projector


GENERAL INFORMATION

SIMPLWINDOWS NAME:	Runco VX22d
CATEGORY:	TV/Video Projector
VERSION:	1.0
SUMMARY:	This module provides RS232 control and true feedback for the Runco VX22d video projector.
GENERAL NOTES:	<p>This module provides RS232 control for the Runco VX22d video projector. It also provides true unsolicited feedback. There are no status queries as of yet for the VX22d.</p> <p>NOTE: The Runco VX22d does not provide Lamp Hour feedback.</p>
CRESTRON HARDWARE REQUIRED:	CNXCOM-6, CNXCOM-2, ST-COM, C2I-COM6, C2COM-2/3
SETUP OF CRESTRON HARDWARE:	RS232 Baud: 19200 Parity: None Data Bits: 8 Stop Bits: 1
VENDOR FIRMWARE:	N/A
VENDOR SETUP:	None
CABLE DIAGRAM:	CNSP-124

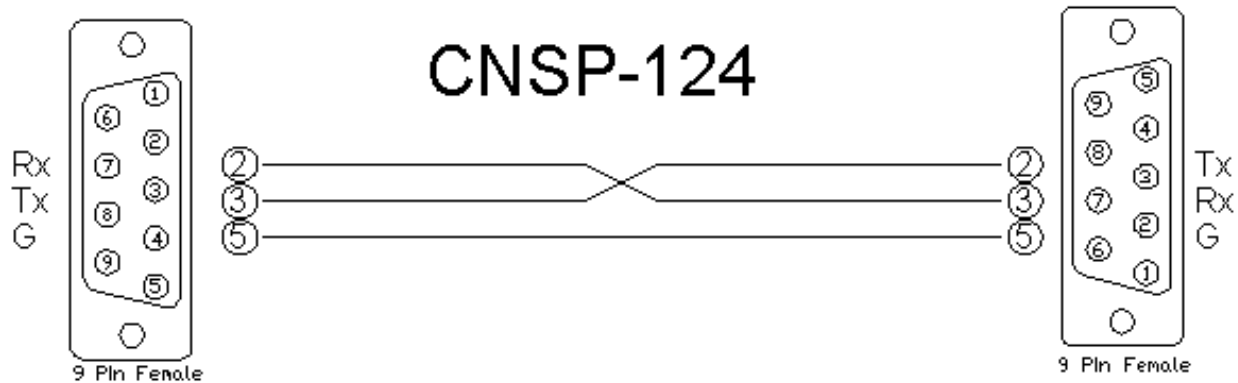

Partner: Runco
Model: VX22d
Device Type: Video Projector


CONTROL:

Power_On/Off/Toggle	D	Pulse to turn the projector on and off.
Input_*	D	Pulse to select the desired input.
Aspect_Ratio	D	Pulse to select the desired aspect ratio.
Image_Preset_*	D	Pulse to select the desired image preset.
Menu	D	Pulse to turn the on-screen menu on and off.
Up/Down/Left/Right	D	Pulse to move through the on-screen menus.
Enter	D	Pulse to select an item in the on-screen menu.
Exit	D	Pulse to escape an item in the on-screen menu.
Adjust_Brightness_Key	D	Pulse to adjust the brightness using menu right/left commands.
Adjust_Color_Level_Key	D	Pulse to adjust the color using menu right/left commands.
Adjust_Contrast_Key	D	Pulse to adjust the contrast using menu right/left commands.
Adjust_Tint_Key	D	Pulse to adjust the tint using menu right/left commands.
From_Device\$	S	Serial signal to be routed from a 2-way serial com port.

FEEDBACK:

Power_On/Off_Fb	D	High to indicate the current power state.
Input_*_Fb	D	High to indicate the currently selected input.
Aspect_Ratio_*_Fb	D	High to indicate the currently selected aspect ratio.
Image_Preset_*_Fb	D	High to indicate the currently selected image preset.
To_Device\$	S	Serial signal to be routed to a 2-way serial com port.

Partner: Runco
Model: VX22d
Device Type: Video Projector

**TESTING:**

OPS USED FOR TESTING:	3.155_1240
SIMPL WINDOWS USED FOR TESTING:	2.08.44
CRES DB USED FOR TESTING:	18.9.1
SYMBOL LIBRARY USED FOR TESTING:	508
SAMPLE PROGRAM:	Runco VX22d Demo
REVISION HISTORY:	V. 1.0