

**Partner: DBX**  
**Model: ZonePro 126x**  
**Device Type: DSP**



## GENERAL INFORMATION

<b>SIMPLWINDOWS NAME:</b>	DBX ZonePro126x Router
<b>CATEGORY:</b>	Digital Sound Processor
<b>VERSION:</b>	1.0B
<b>SUMMARY:</b>	This processor controls a DBX ZonePro 1260,1261,1260m, or 1261m over RS-232.
<b>GENERAL NOTES:</b>	RS-232 Control only. Use this module with the "DBX ZonePro126x Processor" and "DBX ZonePro 126x Mixer". This module is intended for the control of a single DBX ZonePro 1260,1261,1260m, or 1261m over RS-232.
<b>CRESTRON HARDWARE REQUIRED:</b>	2-Series Processor w/RS-232 Port, 3-Series Processor w/RS-232 Port
<b>SETUP OF CRESTRON HARDWARE:</b>	N/A
<b>VENDOR FIRMWARE:</b>	v1.110
<b>VENDOR SETUP:</b>	DBX ZonePRO1261

## CONTROL:

<b>Router_RX\$</b>	S	Connect to the "Module_TX_X" on the DBX ZonePro 126X Processor Module.
<b>Volume_Up</b>	D	Increase Volume Level
<b>Volume_Down</b>	D	Decrease Volume Level
<b>Volume_Mute_Toggle</b>	D	Mute On/Off – Toggles Mute on Rising Edge.
<b>Volume_Mute_On</b>	D	Mute Volume
<b>Volume_Mute_Off</b>	D	Unmute Volume
<b>Volume</b>	A	Set Volume Input Level. 0d (0%) = -inf (inaudible) 65535d (100%) = 20.dB
<b>Input_Zone</b>	A	Specify Router Source/Input (1-12d)

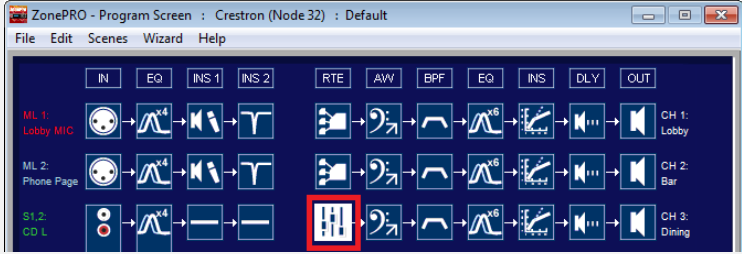
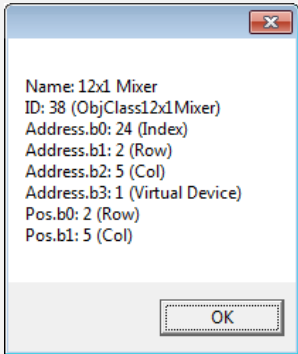
**Partner: DBX**  
**Model: ZonePro 126x**  
**Device Type: DSP**



**FEEDBACK:**

Router_TX\$	S	Connect to "From_Modules" on the DBX ZonePro 126X Processor Module.
Volume_Mute_FB	D	Master Mute Feedback
Volume_FB	A	Indicates the current volume level.
Input_Zone_FB	A	Indicates the current selected input zone (1-11d)

**PARAMETERS:**

Ramp Time	S	Specify Ramp Time in seconds for Volume to Ramp from 0 -100% when using Volume Up/Down Digital Signals.
Object_ID	S	<p>Instance ID tag of router. These ID's change as you group inputs to stereo or run the configuration wizard. Below shows module 3 selected:</p>  <p>Once Selected, hit the keys "CTRL + SHIFT + O" to see id tag.</p>  <p>Enter b0-b1-b3-b3 into the parameter field with dashes in between.</p> <p>Node ID: 32  OBID: 24-2-5-1</p>

**Partner: DBX**  
**Model: ZonePro 126x**  
**Device Type: DSP**

**TESTING:**

<b>OPS USED FOR TESTING:</b>	2-Series: v4.008.0000 3-Series: v1.008.0040
<b>SIMPL WINDOWS USED FOR TESTING:</b>	V4.02.21.00
<b>DEVICE DB USED FOR TESTING:</b>	V53.05.004.00
<b>CRES DB USED FOR TESTING:</b>	V43.00.001.00
<b>SYMBOL LIBRARY USED FOR TESTING:</b>	v810
<b>SAMPLE PROGRAM:</b>	DBX ZonePro 126x v1 Demo MC3.smw
<b>REVISION HISTORY:</b>	v1.0 – Original release.